


4	3	2	1
---	---	---	---

THIS DRAWING IS UNPUBLISHED.
© copyright - By -
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
GO	00	TR	DESCRIPTION	DATE
		R1	REVISED PER ECO-11-005140	25MAR11
				RK HMR

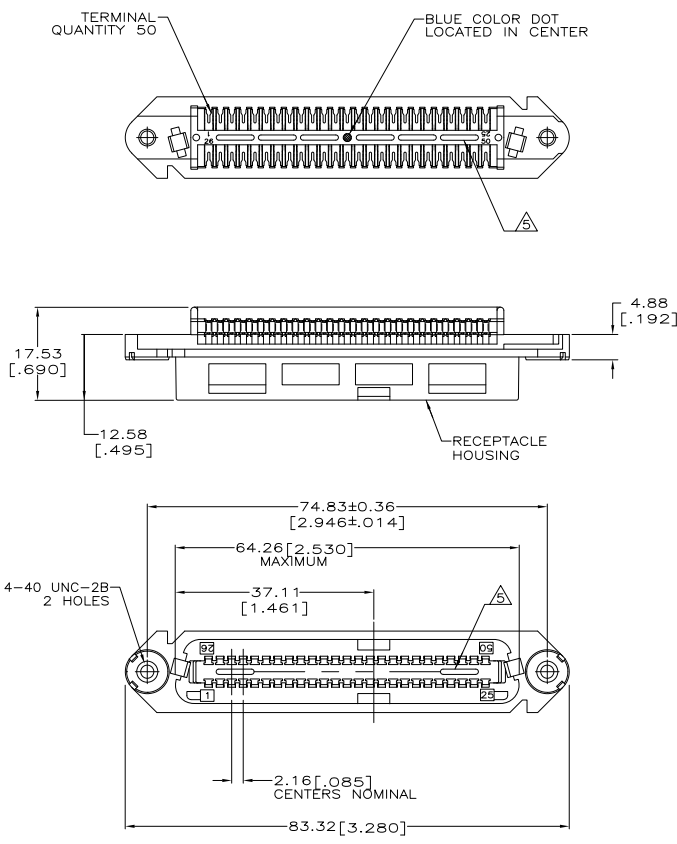

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
3. MATERIAL: HOUSING - THERMOPLASTIC. TERMINAL - HIGH STRENGTH COPPER ALLOY PLATED WITH 0.76μm [.000030] MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76μm [.000030] MIN TOTAL ON MATING SURFACE, OVER 1.27μm [.000050] MIN NICKEL PLATING.
4. WIRE SIZE: 24 & 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTORS. MAXIMUM INSULATION DIAMETER OF 1.14 [.045] IS ACCEPTABLE FOR MOST APPLICATIONS.
5. CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF AMP INCORPORATED.

GRAY	229975-4
BLACK	229975-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE	12 FEB 80	BY	S. BOSS
DATE	14 FEB 80	BY	J.E. SLACK
DATE	14 FEB 80	BY	B. WARD

TE Connectivity

RECEPTACLE ASSEMBLY,
50 POSITION, B-SLOT, WITH
4-40 HOLES, CHAMP-LOK®

SIZE	A2	CAGE CODE	00779	DRAWING NO	229975	RESTRICTED TO	—
MATERIAL	—	FINISH	—	WEIGHT	—		

CUSTOMER DRAWING

SCALE 2:1 SHEET 1 of 1 REV R1