

**Square 0.134" 4-Character
5x5 Dot Matrix Serial Input Dot Addressable Intelligent Display® Devices**

Lead (Pb) Free Product - RoHS Compliant



Yellow SCDQ5541P/Q/R

Super-red SCDQ5542P/Q/R

Green SCDQ5543P/Q/R

High Efficiency Green SCDQ5544P/Q/R

DESCRIPTION

The SCDQ5541X (Yellow), SCDQ5542X (Super-red), SCDQ5543X (Green), and SCDQ5544X (High Efficiency Green) are four digit, dot addressable 5 x 5 dot matrix, serial input, alphanumeric Intelligent Display devices in a square format. The four digits are packaged in a rugged, high quality, optically transparent, plastic package several mounting options. The SIP Pin for standard display mounting and 90° Bend SIP for side mounting. Additionally, a connector/header configuration is also available for display side mounting.

The on-board CMOS has a 100 bit RAM, one bit associated with one LED, each to generate User Defined Characters. In Power Down Mode, quiescent current is <50 µA.

The SCDQ554XX is designed for work with the serial port of most common microprocessors. Data is transferred into the display through the Serial Data Input (DATA), clocked by the Serial Data Clock (SDCLK), and enabled by the Load Input (LOAD).

FEATURES

- Four 3.40 mm (0.134") 5 x 5 Dot Matrix Characters in Red, Yellow, Super-red, Green, or High Efficiency Green
- Optimum Display Surface Efficiency (display area to package ratio)
- Square Character Format to Display Data in a Vertical or Horizontal Format
- High Speed Data Input Rate: 5.0 MHz
- ROMless Serial Input, Dot Addressable Display—Ideal for User Defined Characters
- Built-in Decoders, Multiplexers and LED Drivers
- Readable from 1.8 meters (6 Feet)
- Wide Viewing Angle, ± 55° in X-Axis and Y-Axis
- Attributes:
 - 100 Bit RAM for User Defined Characters
 - Eight Dimming Levels
 - Power Down Model (<250 µW)
 - Software Clear Function
 - Lamp Test
 - 3.3 V Capability

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R**Ordering Information**

Type	Color of Emission	Character Height mm (inch)	Ordering Code
SCDQ5541P	yellow	3.2 (0.134)	Q68100A1472P
SCDQ5542P	super-red		Q68100A1078P
SCDQ5543P	green		Q68100A1473P
SCDQ5544P	high efficiency green		Q68100A1474P
SCDQ5541Q	yellow	3.2 (0.134)	Q68100A1472Q
SCDQ5542Q	super-red		Q68100A1078Q
SCDQ5543Q	green		Q68100A1473Q
SCDQ5544Q	high efficiency green		Q68100A1474Q
SCDQ5541R	yellow	3.2 (0.134)	Q68100A1472R
SCDQ5542R	super-red		Q68100A1078R
SCDQ5543R	green		Q68100A1473R
SCDQ5544R	high efficiency green		Q68100A1474R

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Maximum Ratings

Operation in excess of any of these conditions may result in permanent damage to this device ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Operating temperature range	T_{op}	- 40 ... + 85	$^\circ\text{C}$
Storage temperature range	T_{stg}	- 40 ... + 100	$^\circ\text{C}$
Supply Voltage V_{CC} to GND (non-operating)	V_{CC}	-0.5 to + 7.0	V
Input Voltage, any Pin to GND		-0.5 to V_{CC} to 5.5	V
Solder Temperature, Connector only 1.59 mm (0.063") below seating plane, $t < 5.0$ s	T_S	260	$^\circ\text{C}$
Relative Humidity (non-condensing)		85	%
ESD (100 pF, 1.5 k Ω)	V_Z	2.0	kV
Input Current		± 100	mA
Power Dissipation at 85°C		0.65	W

Optical Characteristics at 25°C

($V_{CC}=5.0$ V at 100% brightness level, viewing angle: X axis $\pm 55^\circ$, Y axis $\pm 65^\circ$)

Description	Symbol	Values				Unit
		Yellow SCDQ5541	Super-red SCDQ5542	Green SCDQ5543	High Efficiency Green SCDQ5544	
Luminous Intensity (min.)	I_{Vpeak}	1.8	1.8	1.8	2.1	mcd
Character Average (#displayed all digits) (typ.)		5.4	5.4	5.4	6.4	mcd
Peak Wavelength (typ.)	λ_{peak}	583	630	565	568	nm
Dominant Wavelength (typ.)	λ_{dom}	585	620	570	574	nm

Notes:


1. Dot to dot intensity matching at 100% brightness is 1.8:1.
2. Displays are binned for hue at 2.0 nm intervals.
3. Displays within a given intensity category have an intensity matching of 1.5:1 (max.).

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R


Package Outlines

Dimensions in mm (inch)


Typical Package Outline & Matrix

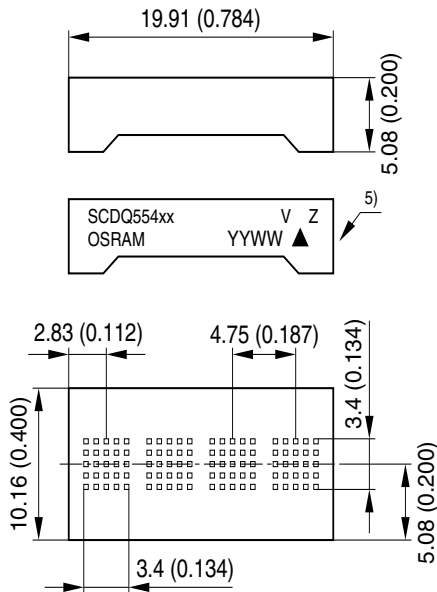


SCDQ554XP SIP Package

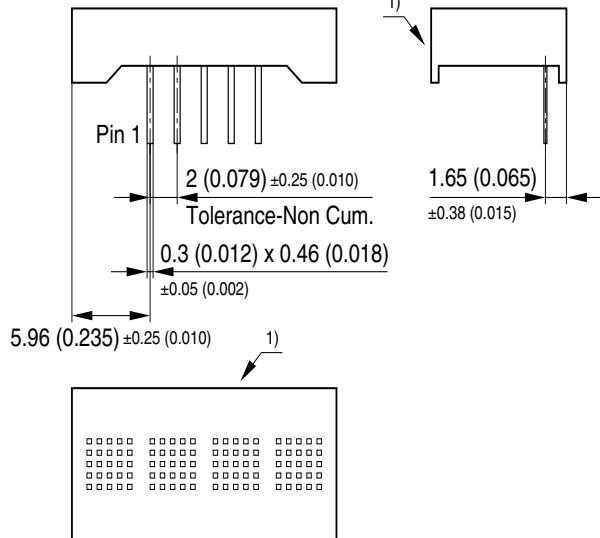

SCDQ554XQ 90° SIP Package

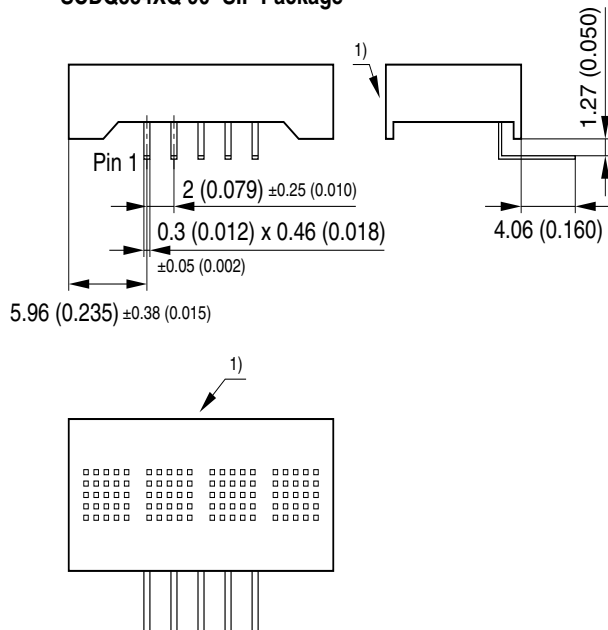

SCDQ554XR 90° Connector/Header Package

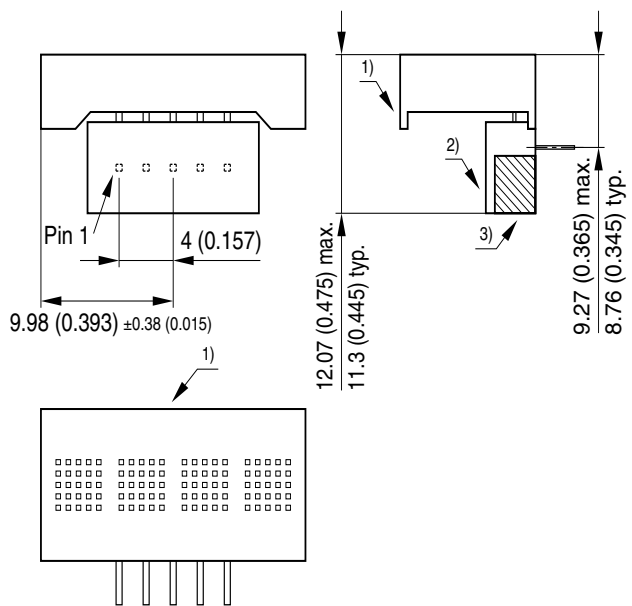

- 1) Part marking is on this side of the display.
RoHS Compliant (lead-free) have a "Z" marked to the right of the date code.
- 2) Molex header, 53290-0510 mounted on the display.
- 3) Molex receptacle, 52418-0510 mounted on the customer's PCB. Supplied by the customer.
Use Pin 1 designation on this drawing, not the Molex connector specification.
- 4) Unless otherwise specified all tolerances are ±0.25 (0.010).
- 5) Part marking
▲ = Pin 1 Locator V = Hue Bin (No Hue for red or orange) Z = LI Bin YYWW = Date Code

IDOD5001

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Electrical characteristics (over operating temperature, unless otherwise specified, $T_A = 25^\circ\text{C}$)

Parameter	Min.	Typ.	Max.	Units	Conditions
V_{CC}	4.5	—	5.5	V	—
I_{CC} (Power Down Mode)	—	—	5.0	μA	$V_{CC}=5.0\text{ V}$, all inputs=0 V or V_{CC}
I_{CC} (16 dots on per digit) ¹⁾	—	100	145	mA	$V_{CC}=5.0\text{ V}$, “#” displayed in all 4 digits at 100% brightness at 25°C
V_{IH}	3.5	—	—	V	$V_{CC}=4.5\text{ V to }5.5\text{ V}$
V_{IL}	—	—	1.5	V	$V_{CC}=4.5\text{ V to }5.5\text{ V}$
I_{IH}	—	—	10	μA	$V_{CC}=V_{IN}=5.0\text{ V}$ (all inputs)
I_{IL}	—	—	-10	μA	$V_{CC}=5.0\text{ V}$, $V_{IN}=0\text{ V}$ (all inputs)
Internal Mux Frequency	375	768	1086	Hz	—
θ_{ja}	—	65	—	$^\circ\text{C/W}$	—


Notes:

- I_{CC} is an average value, the Peak current is $\frac{5}{3} \times I_{CC}$.
- Contact manufacturer for 3.3 volt operation.

Input Circuit

The input resistor/diode network shown below is used for ESD protection and to eliminate substrate latch-up caused by input voltage over/under shoot.

Inputs

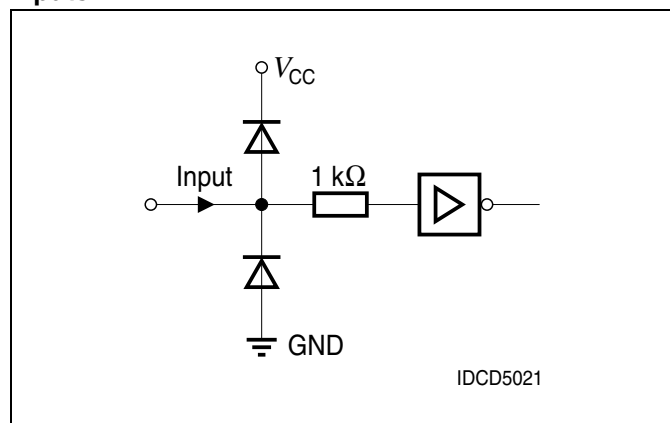

Pinout and Pin Definitions


Pin	Function	Definitions
1	LOAD	Low input enables data clocking into 8-bit serial shift register. When LOAD goes high, the contents of 8-bit serial Shift Register will be decoded.
2	SDATA	Serial data input
3	SDCLK	Loads data into the 8-bit serial data register on a low to high transition
4	V_{CC}	Power supply
5	GND	Power supply ground

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Close Up of Data "Write" Cycle



Device Timing

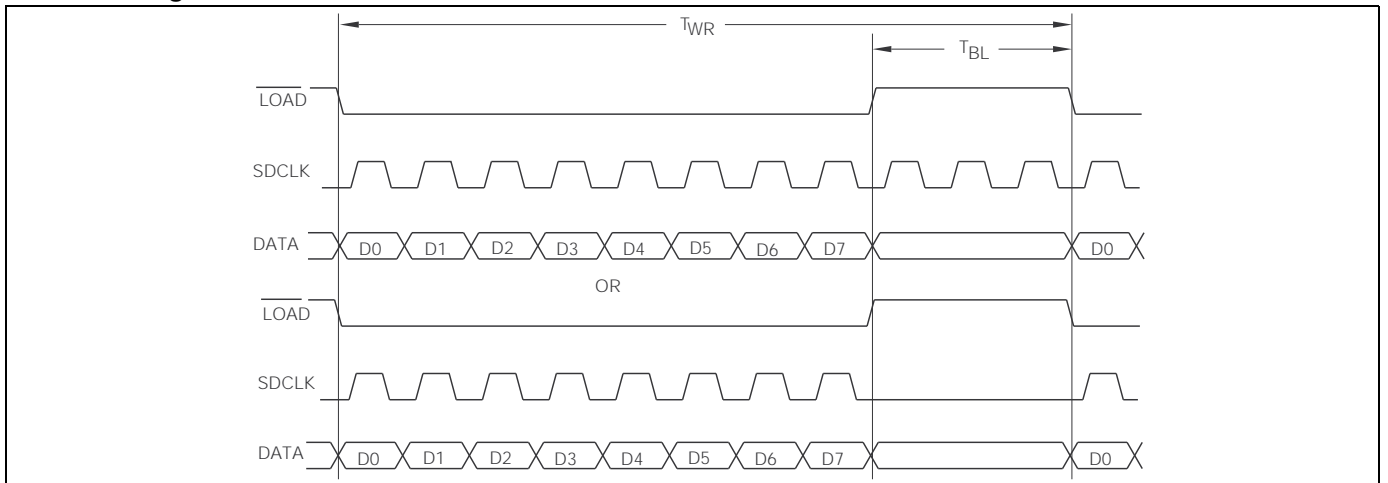

Write Cycle Timing

(over operating temperature range, $V_{CC}=V_{LL}=4.5\text{ V to }5.5\text{ V}$)


Symbol	Description	Min.	Max.	Units
T_{LDS}	Load Setup Time	50	—	ns
T_{DS}	Data Setup Time	50	—	ns
T_{SDCLK}	Clock Period	200	—	ns
T_{SDCW} (HI or LOW)	Clock Width	70	—	ns
T_{LDH}	Load Hold Time	0	—	ns
T_{DH}	Data Hold Time	25	—	ns
T_{WR}	Total Write Time	2.25	—	μs
T_{BL}	Time Between Writes	600	—	ns
T_{RST}	Reset Active Time	600	—	ns

Notes:


- T_{WR} =Setup Time + 8 Clock Times + Hold Times + Time Between Writes.
- Data is shifted into the display's 8 bit shift register on the positive going edge of the SDCLK.
- Shift register data is evaluated when Load goes high.

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Dot Matrix Format

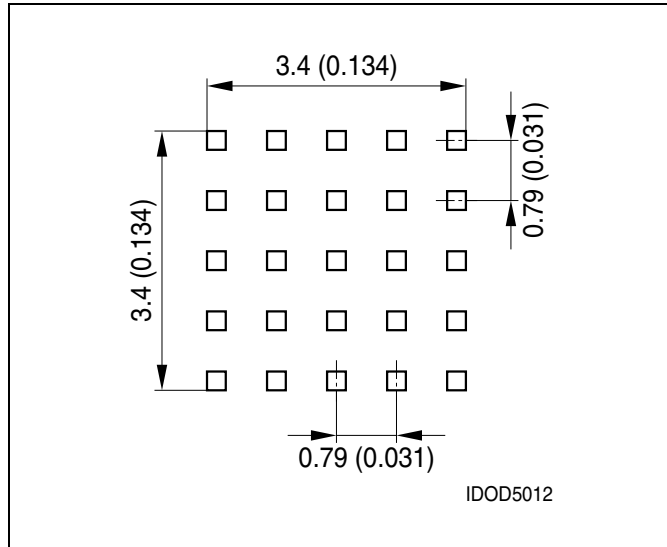


Character Address, Row, & Column Data Map

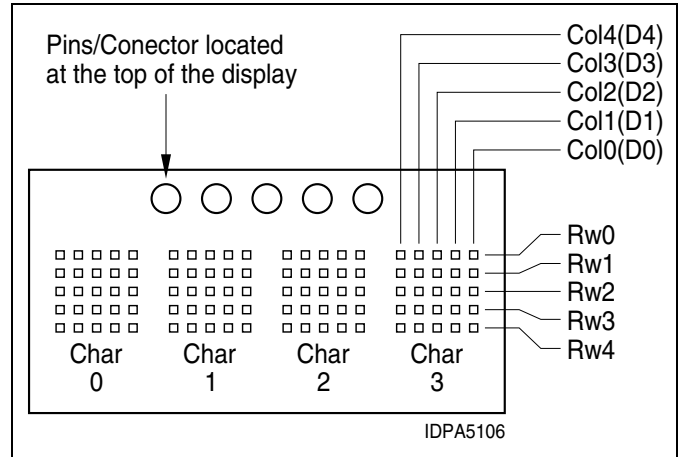


1. Viewed from the LED side of the display with the display in a horizontal position.
2. The row address and column data are typical for all character positions. The LED is on when the data bit = 1 and off when the data bit = 0.

Suggested Display Mounting SIP Package

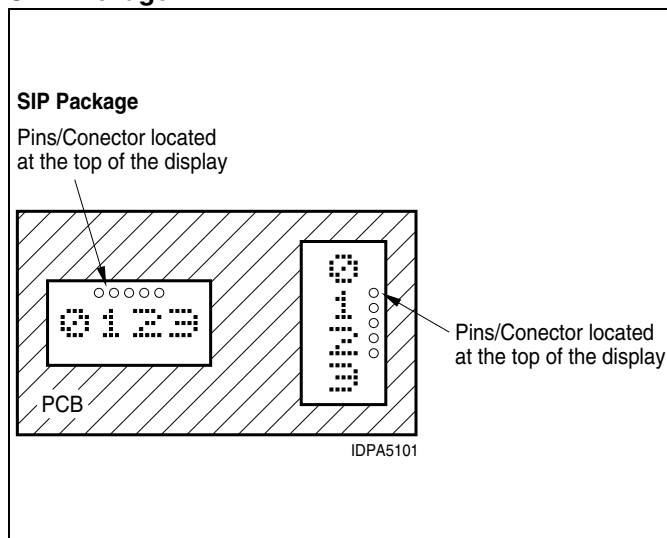

Suggested Display Mounting 90° SIP Connector / Header Packages

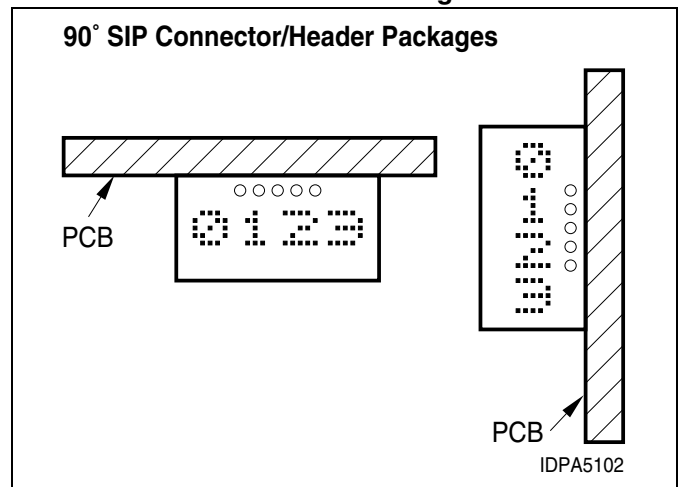

Operation of the SCDQ554XX

The SCDQ554XX display consists of a CMOS IC containing control logic and drivers for four 5 x 5 characters. These components are assembled in a compact plastic package.


Individual LED dot addressability allows the user great freedom in creating special characters or mini-icons. The User Definable Character Set examples illustrate 200 different character and symbol possibilities. Each example has the hexadecimal code required to display characters in a horizontal or vertical format. See Figures above, Suggested Display Mounting, for the display positioning. Generally, the contacts should be on the right side of the display for the vertical format and on the top of the display for the horizontal format.

The serial data interface provides a highly efficient interconnection between the display and the mother board. The SCDQ554XX requires only three input lines as compared to 15 for an equivalent four character parallel input part.

The on-board CMOS IC is the electronic heart of the display. The IC accepts decoded serial data, which is stored in the internal RAM. Asynchronously the RAM is read by the character multiplexer at a strobe rate that results in a flicker free display. shows the three functional areas of the IC. These include: the input serial data register and control logic, a 100 bits two port RAM, and an internal multiplexer/display driver.

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R


SCDQ Block Diagram

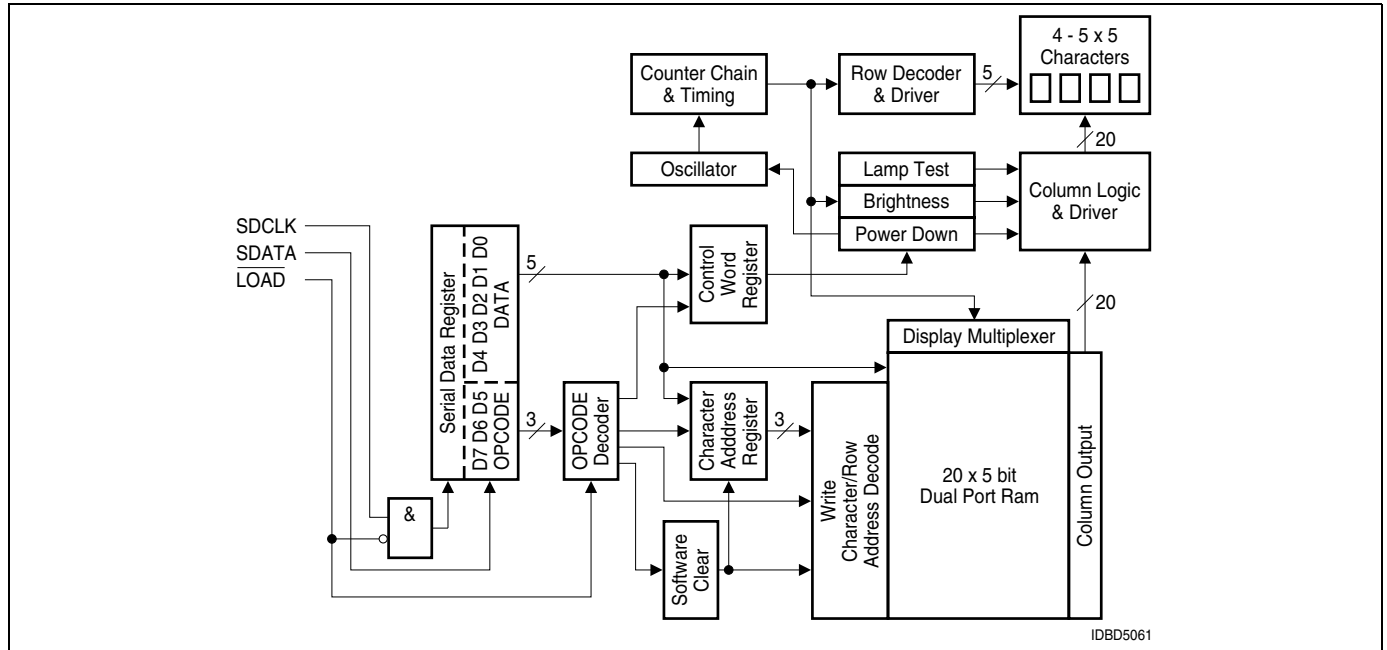

The following explains how to format the serial data to be loaded into the display. The user supplies a string of bit mapped decoded characters. The contents of this string is shown in Figure „Loading Serial Character Data A“ (**page 8**). Figure „Loading Serial Character Data B“ (**page 8**) shows that each character consists of six 8 bit words. The first word encodes the display character location and the succeeding five bytes are row data. The row data represents the status (On, Off) of individual column LEDs. Figure „Loading Serial Character Data C“ (**page 8**) shows that each 8 bit word is formatted to include a three bit Operational Code (OPCODE) defined by bits D7–D5 and five bits (D4–D0) representing Column Data, Character Address, or Control Word Data.

Figure „Loading Serial Character Data D“ (**page 8**) shows the sequence for loading the bytes of data. Bringing the LOAD line low enables the serial register to accept data. The shift action occurs on the low to high transition of the serial data clock (SDCLK). The least significant bit (D0) is loaded first. After eight clock pulses the LOAD line is brought high. With this transition the OP CODE is decoded. The decoded OP CODE directs D4–D0 to be latched in the Character Address register, stored in the RAM as Column data, or latched in the Control Word register. The control IC requires a minimum 600 ns delay between successive byte loads.

Loading Serial Character Data

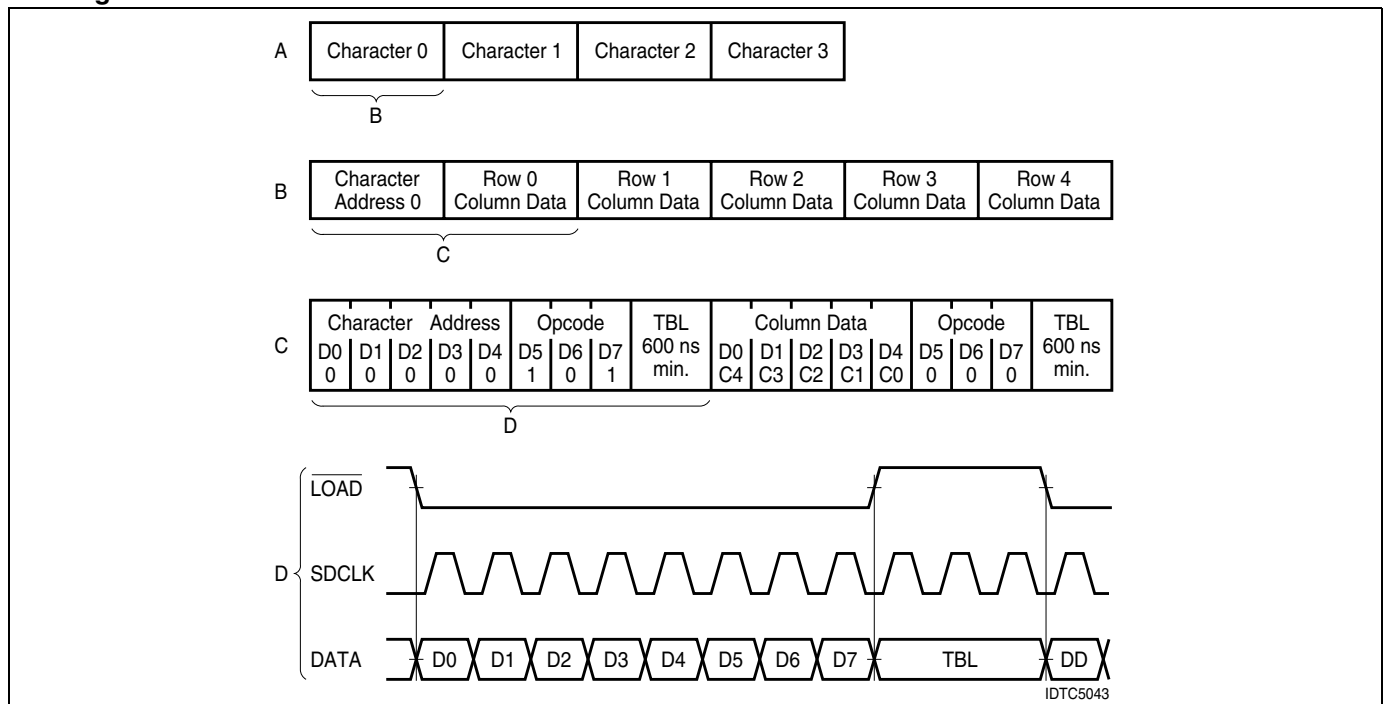

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

The Character Address bits, D4–D0 stored in the Character Address Register and the Column Data Instruction's Row Address bits, D7–D5, direct the Column Data bits, D4–D0 to specific RAM location. See the Instruction Set Table for address and data format. Figure „Writing Character 'D' Example“ (page 9) shows the Row Address for the example character “D” See Figure „Character Address, Row, & Column Data Map“ (page 7) for the dot positioning (Display contacts are at the top of the display).

Column data is written and read asynchronously from the 200 bit RAM. Once loaded the internal oscillator and character multiplexer reads the data from the RAM. These characters are row strobed with column data as shown in Figure „Row Strobe Example“ (page 10). The character strobe rate is determined by the internal IC's÷320 counter.

Instruction Set


OPERATION	D 7	D 6	D 5	D 4	D 3	D 2	D 1	D 0	HEX	DESCRIPTION
CONTROL WORD	1	1	1	1	L T	B r	B r	B r	F0+X	Select Control Word plus operand See Control Word Format
Power Down Mode	1	1	1	1	1	1	1	1	FF	Power Down Mode=0% Brightness
SFT CLEAR	1	1	0	0	0	0	0	0	C0	Software Clear
ADDRESS REGISTER	1	0	1	0	0	0	0	0	A0	Select Digit Address 0
	1	0	1	0	0	0	0	1	A1	Select Digit Address 1
CHR ADRS 0–3	1	0	1	0	0	0	1	0	A2	Select Digit Address 2
	1	0	1	0	0	0	1	1	A3	Select Digit Address 3
COLUMN DATA	0	0	0	D 4	D 3	D 2	D 1	D 0	00+X	Row 0 D4–D0=Column Data
	0	0	1	D 4	D 3	D 2	D 1	D 0	20+X	Row 1 D4–D0=Column Data
	0	1	0	D 4	D 3	D 2	D 1	D 0	40+X	Row 2 D4–D0=Column Data
	0	1	1	D 4	D 3	D 2	D 1	D 0	60+X	Row 3 D4–D0=Column Data
	1	0	0	D 4	D 3	D 2	D 1	D 0	80+X	Row 4 D4–D0=Column Data

Row data is written to the character address contained in the Character Address Register.

Writing Character “D” Example


	Op code			Column Data					Hex
	D7	D6	D5	D4 C0	D3 C1	D2 C2	D1 C3	D0 C4	
Row 0	0	0	0	1	1	1	1	0	1E
Row 1	0	0	1	1	0	0	0	1	31
Row 2	0	1	0	1	0	0	0	1	51
Row 3	0	1	1	1	0	0	0	1	71
Row 4	1	0	0	1	1	1	1	0	9E

Row and Column Locations for a Character “D”

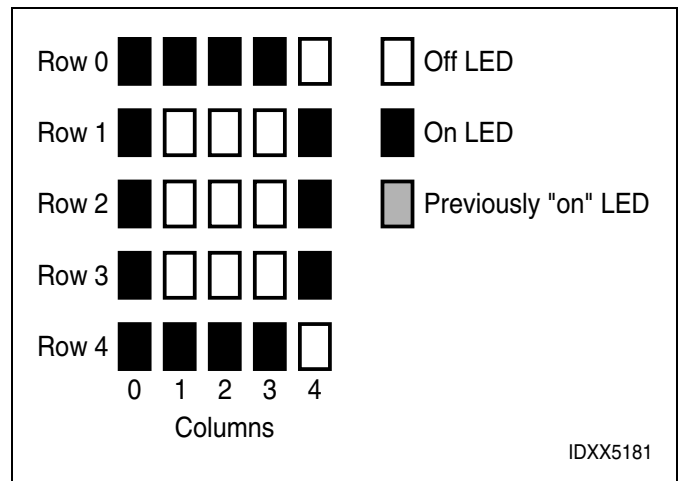

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Row Strobe Example

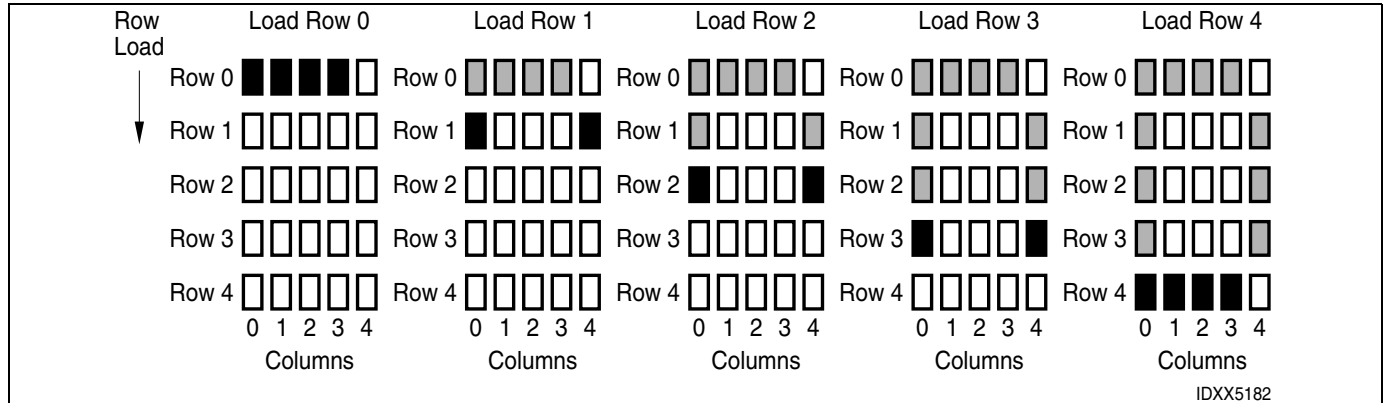

The user can activate four Control functions. These include: LED Brightness Level, Lamp Test, IC Power Down, or Display Clear. OPCODEs and five bit words are used to initiate these functions. The OPCODEs and Control Words for the Character Address and Loading Column Data are shown in Instruction Set Table.

The user can select seven specific LED brightness levels. These brightness levels (in percentages of full brightness of the display) include: 100% (F0HEX), 53% (F1HEX), 40% (F2HEX), 27% (F3HEX), 20% (F4HEX), 13% (F5HEX), and 6.6% (F6HEX). The brightness levels are controlled by changing the duty factor of the row strobe pulse.

Display Brightness

Op code D7 D6 D5	Control Word D4 D3 D2 D1 D0	Hex	Operation Level
1 1 1	1 0 0 0 0	F0	100%
1 1 1	1 0 0 0 1	F1	53%
1 1 1	1 0 0 1 0	F2	40%
1 1 1	1 0 0 1 1	F3	27%
1 1 1	1 0 1 0 0	F4	20%
1 1 1	1 0 1 0 1	F5	13%
1 1 1	1 0 1 1 0	F6	6.6%

The SCDQ554X offers a unique Display Power Down feature which reduces I_{CC} to less than 50 μ A. When FFHEX is loaded the display is set to 0% brightness and the internal multiplex clock is stopped. When in the Power Down mode data may still be written into the RAM. The display is reactivated by loading a new rightness Level Control Word into the display.

Power Down

Op code D7 D6 D5	Control Word D4 D3 D2 D1 D0	Hex	Operation Level
1 1 1	1 1 1 1 1	FF	0% brightness

The Lamp Test is enabled by loading F8HEX into the serial shift register. This Control Word sets all of the LEDs to a 53% brightness level. Operation of the Lamp Test has no affect on the RAM and is cleared by loading a Brightness Control Word.

Lamp Test

Op code D7 D6 D5	Control Word D4 D3 D2 D1 D0	Hex	Operation Level
1 1 1	1 0 B B B		Lamp Test (OFF)
1 1 1	1 1 0 0 0	F8	Lamp Test (ON)

The Software Clear (C0HEX) clears the Address Register and the RAM. The display is blanked and the Character Address Register will be set to Character 0. The internal counter and the Control Word Register are unaffected. The Software Clear will remain active until the next data input cycle is initiated.

Software Clear

Op code D7 D6 D5	Control Word D4 D3 D2 D1 D0	Hex	Operation Level
1 1 0	0 0 0 0 0	C0	CLEAR

Electrical & Mechanical Considerations

Interconnect Considerations

Optimum product performance can be had when the following electrical and mechanical recommendations are adopted. The SCDQ554XX's IC is constructed in a high speed CMOS process, consequently high speed noise on the SERIAL DATA, SERIAL DATA CLOCK, and LOAD lines may cause incorrect data to be written into the serial shift register. Adhere to transmission line termination procedures when using fast line drivers and long cables (>10 cm).

Good digital grounds (pin 1) and power supply decoupling (pin 2) will insure that I_{CC} (<350 mA peak) switching currents do not generate localized ground bounce. Therefore it is recommended that each display package use a 0.1 μ F and 20 μ F capacitor between V_{CC} and ground.

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

ESD Protection

The input protection structure of the SCDQ554XX provides significant protection against ESD damage. It is capable of withstanding discharges greater than 2.0 kV. Take all the standard precautions, normal for CMOS components. These include properly grounding personnel, tools, tables, and transport carriers that come in contact with unshielded parts. If these conditions are not, or cannot be met, keep the leads of the device shorted together or the parts in anti-static packaging.

Soldering Considerations

The SCDQ554XX can be hand soldered with SN63 solder using a grounded iron set to 260°C.

Wave soldering is also possible following these conditions: Pre-heat that does not exceed 93°C on the solder side of the PC board or a package surface temperature of 85°C. Water soluble organic acid flux (except carboxylic acid) or resin-based RMA flux without alcohol can be used.

Wave temperature of 245°C ± 5°C with a dwell between 1.5 s to 3.0 s. Exposure to the wave should not exceed temperatures above 260°C for five seconds at 1.59 mm (0.063") below the seating plane. The packages should not be immersed in the wave.

The SCDQ554XR connects to an external connector receptacle which may be soldered before inserting the SCDQ554XR Display. In this way, only the connector is subject to the user's soldering process. The Molex 52418-0510 receptacle called out in the product drawing can be used in solder reflow processes. See Molex for specifications.

Post Solder Cleaning Procedures

The least offensive cleaning solution is hot D.I. water (60°C) for less than 15 minutes. Addition of mild saponifiers is acceptable. Do not use commercial dishwasher detergents.

For faster cleaning, solvents may be used. Exercise care in choosing solvents as some may chemically attack the nylon package. For further information refer to Appnotes 18 and 19 at www.osram-os.com or in the current Short Form Catalogue. See Appnote 19, Table 2, "Displays-Group 2".

Optical Considerations

The 3.12 mm (0.123") high character of the SCDQ554XX gives readability up to five feet. Proper filter selection enhances readability over this distance.

Using filters emphasizes the contrast ratio between a lit LED and the character background. This will increase the discrimination of different characters. The only limitation is cost. Take into consideration the ambient lighting environment for the best cost/benefit ratio for filters.

Incandescent (with almost no green) or fluorescent (with almost no red) lights do not have the flat spectral response of sunlight. Plastic band-pass filters are an inexpensive and effective way to strengthen contrast ratios. The SCDQ5542X is a super-red display and should be matched with long wavelength pass filter in the 570 nm to 590 nm range. The SCDQ5541X/3X/4X should be matched with a yellow-green band-pass filter that peaks at 565 nm. For displays of multiple colors, neutral density grey filters offer the best compromise.

Additional contrast enhancement is gained by shading the displays. Plastic band-pass filters with built-in louvers offer the next step up in contrast improvement. Plastic filters can be improved further with anti-reflective coatings to reduce glare. The trade-off is fuzzy characters. Mounting the filters close to the display reduces

this effect. Take care not to overheat the plastic filter by allowing for proper air flow.


Optimal filter enhancements are gained by using circular polarized, anti-reflective, band-pass filters. The circular polarizing further enhances contrast by reducing the light that travels through the filter and reflects back off the display to less than 1%.

Several filter manufacturers supply quality filter materials. Some of them are: Panelgraphic Corporation, W. Caldwell, NJ; SGL Homa-lite, Wilmington, DE; 3M Company, Visual Products Division, St. Paul, MN; Polaroid Corporation, Polarizer Division, Cambridge, MA; Marks Polarized Corporation, Deer Park, NY; Hoya Optics, Inc., Fremont, CA.

One last note on mounting filters: recessing displays and bezel assemblies is an inexpensive way to provide a shading effect in overhead lighting situations. Several Bezel manufacturers are: R.M.F. Products, Batavia, IL; Nobex Components, Griffith Plastic Corp., Burlingame, CA; Photo Chemical Products of California, Santa Monica, CA; I.E.E.-Atlas, Van Nuys, CA.


SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

SCDQ554XX Interface to Siemens/Intel 8031 Microprocessor (using serial port in mode 0)

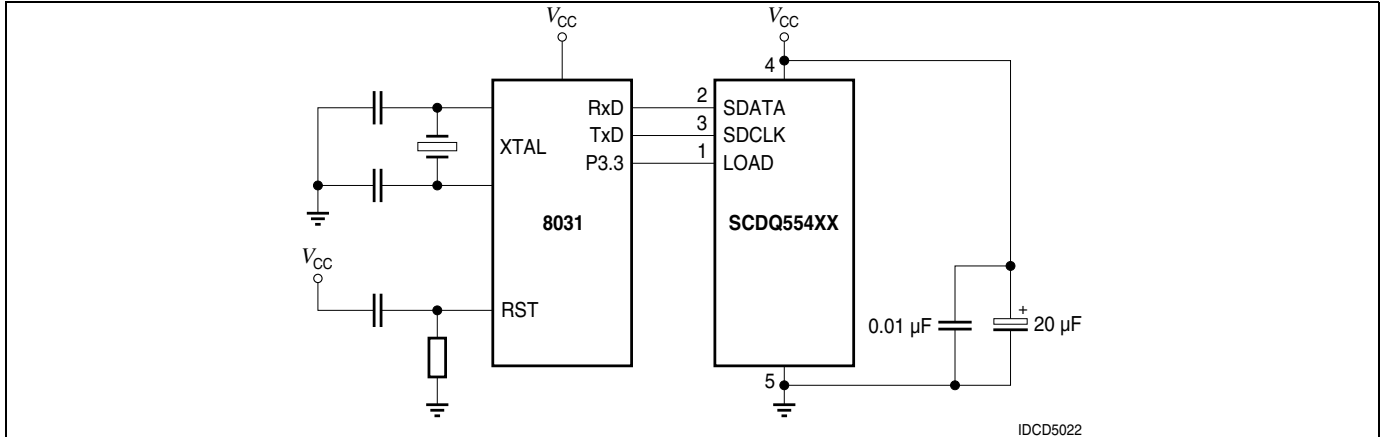

IDCD5022

SCDQ554XX Interface to Siemens/Intel 8031 Microprocessor (using one bit of parallel port as serial input)

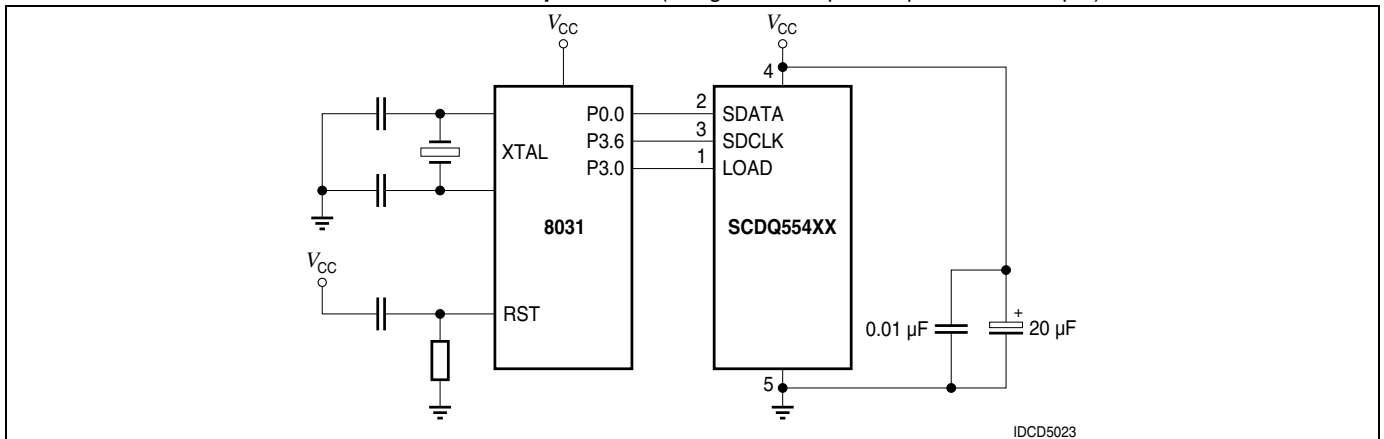

IDCD5023


Microprocessor Interface

The microprocessor interface is through the serial port, SPI port or one out of eight data bits on the eight bit parallel port and also control lines SDCLK and LOAD.

Power Up Sequence

Upon power up display will come on at random. Thus the display should be reset at power-up. The reset will set the Address Register to Digit 0, User RAM is set to 0 (display blank) the Control Word is set to 0 (100% brightness with Lamp Test off) and the internal counters are reset.

SCDQ554XX Interface with Motorola 68HC05C4 Microprocessor (using SPI port)

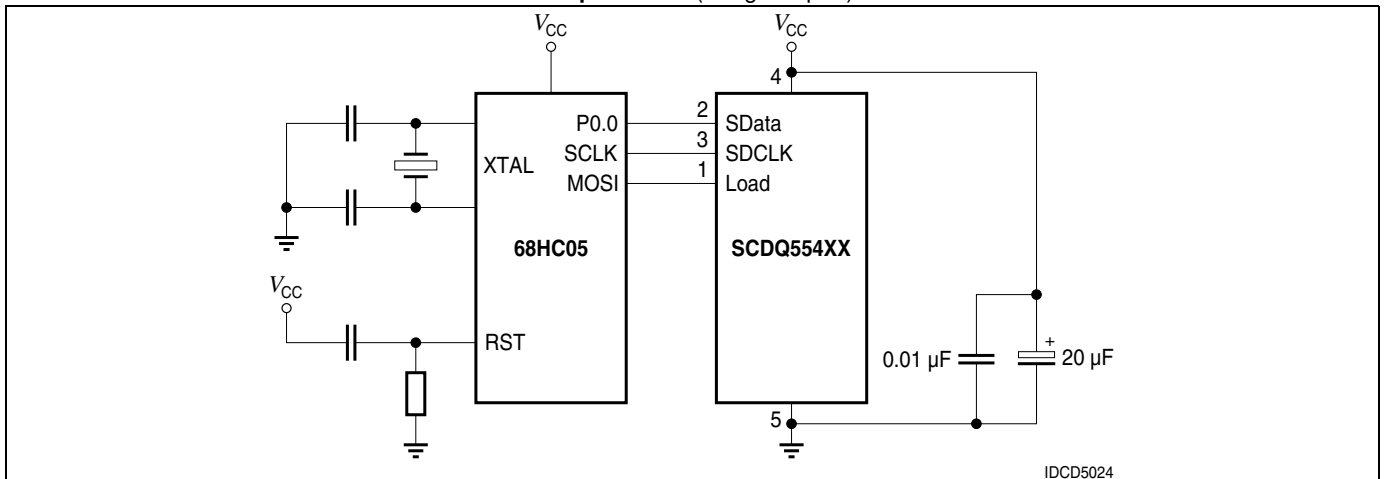

IDCD5024

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Loading Data into the Display

Use following procedure to load data into the display:

1. Power up the display.
2. Step A: software clear the display.
3. Step B: Load the Control Word with the desired brightness level.
4. Load the Digit Address into the display.
5. Load display row and column data for the selected digit.
6. Repeat steps 4 and 5 for all digits.

Data Contents for the Display in a Horizontal Format “↑AB↓”

Step	D7	D6	D5	D4	D3	D2	D1	D0	Function
A	1	1	0	0	0	0	0	0	CLEAR
B (optional)	1	1	1	1	0	B	B	B	BRIGHTNESS SELECT
1	1	0	1	0	0	0	0	0	DIGIT D0 SELECT
2	0	0	0	0	0	1	0	0	ROW 0 D0 (↑)
3	0	0	1	0	1	1	1	0	ROW 1 D0 (↑)
4	0	1	0	1	0	1	0	1	ROW 2 D0 (↑)
5	0	1	1	0	0	1	0	0	ROW 3 D0 (↑)
6	1	0	0	0	0	1	0	0	ROW 4 D0 (↑)
7	1	0	1	0	0	0	0	1	DIGIT D1 SELECT
8	0	0	0	0	0	1	0	0	ROW 0 D1 (A)
9	0	0	1	0	1	0	1	0	ROW 1 D1 (A)
10	0	1	0	1	1	1	1	1	ROW 2 D1 (A)
11	0	1	1	1	0	0	0	1	ROW 3 D1 (A)
12	1	0	0	1	0	0	0	1	ROW 4 D1 (A)
13	1	0	1	0	0	0	1	0	DIGIT D2 SELECT
14	0	0	0	1	1	1	1	0	ROW 0 D2 (B)
15	0	0	1	0	1	0	0	1	ROW 1 D2 (B)
16	0	1	0	0	1	1	1	0	ROW 2 D2 (B)
17	0	1	1	0	1	0	0	1	ROW 3 D2 (B)
18	1	0	0	1	1	1	1	0	ROW 4 D2 (B)
19	1	0	1	0	0	0	1	1	DIGIT D3 SELECT
20	0	0	0	0	0	1	0	0	ROW 0 D3 (↓)
21	0	0	1	0	0	1	0	0	ROW 1 D3 (↓)
22	0	1	0	1	0	1	0	1	ROW 2 D3 (↓)
23	0	1	1	0	1	1	1	0	ROW 3 D3 (↓)
24	1	0	0	0	0	1	0	0	ROW 4 D3 (↓)

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

User Definable Character Set Examples*

Upper and lower case alphabets

HEX CODE	04 2A 5F 71 91	HEX CODE	87 6C 2C 07	HEX CODE	1E 29 30 30 0F	HEX CODE	91 7F 95 35 0A	HEX CODE	8E 71 51 51 11	HEX CODE	91 7F 44 44 0E	HEX CODE	9F 75 55 55 11	HEX CODE	9F 74 54 54 10	HEX CODE	8E 71 51 51 17	HEX CODE	9F 64 44 44 1F	HEX CODE	80 74 5F 31 00
HEX CODE	01 21 41 71 9E	HEX CODE	82 61 2E 1E	HEX CODE	13 34 58 74 93	HEX CODE	9F 64 9A 35 11	HEX CODE	9F 61 41 41 01	HEX CODE	9F 68 44 44 1F	HEX CODE	9F 68 44 44 1F	HEX CODE	8E 71 51 51 0E	HEX CODE	9F 74 54 54 08	HEX CODE	8E 71 55 55 01	HEX CODE	9F 74 56 56 08
HEX CODE	0F 30 4E 51 9E	HEX CODE	89 75 55 35 12	HEX CODE	1F 34 44 84	HEX CODE	90 70 5F 35 10	HEX CODE	9E 61 41 41 1E	HEX CODE	9C 62 44 44 1C	HEX CODE	9F 62 44 44 1F	HEX CODE	91 6A 4A 2A 11	HEX CODE	90 68 47 28 10	HEX CODE	91 73 55 55 11	HEX CODE	91 74 56 56 11
HEX CODE	00 2E 72 8D	HEX CODE	86 69 2E 01	HEX CODE	10 5E 84	HEX CODE	9F 65 25 02	HEX CODE	86 69 49 09	HEX CODE	82 65 45 1F	HEX CODE	86 6D 4D 2D 04	HEX CODE	82 6F 4F 28 00	HEX CODE	86 69 49 28 0B	HEX CODE	9F 62 44 24 03	HEX CODE	80 65 57 21 00
HEX CODE	26 42 7C 8C	HEX CODE	82 61 2E 00	HEX CODE	10 30 56 78 96	HEX CODE	9F 62 25 00	HEX CODE	80 71 9F 00	HEX CODE	87 68 44 2C	HEX CODE	8F 64 44 2B 07	HEX CODE	86 69 49 28 06	HEX CODE	8F 64 4A 2A 04	HEX CODE	84 6A 4A 2A 0F	HEX CODE	82 62 44 24 0B
HEX CODE	00 23 44 8C	HEX CODE	80 61 2A 08	HEX CODE	08 3C 48 5A 84	HEX CODE	88 7E 29 00	HEX CODE	8E 61 41 01	HEX CODE	8C 62 41 02	HEX CODE	8F 62 44 02 05	HEX CODE	80 66 46 29 00	HEX CODE	80 65 42 24 08	HEX CODE	88 6B 4D 2A 00	HEX CODE	88 78 38 28 08
HEX CODE	0E 31 55 79 8E	HEX CODE	04 2C 44 68 8E	HEX CODE	1E 21 46 68 9F	HEX CODE	91 55 35 09	HEX CODE	1E 4E 61 9E	HEX CODE	06 2A 5F 62 82	HEX CODE	06 2A 5F 61 9E	HEX CODE	06 28 5E 71 8E	HEX CODE	06 28 5E 71 8E	HEX CODE	1F 22 44 68 88	HEX CODE	0E 31 4E 71 8E
HEX CODE	0E 31 55 79 8E	HEX CODE	04 2C 44 68 8E	HEX CODE	1E 21 46 68 9F	HEX CODE	91 55 35 09	HEX CODE	1E 4E 61 9E	HEX CODE	06 2A 5F 62 82	HEX CODE	06 2A 5F 61 9E	HEX CODE	06 28 5E 71 8E	HEX CODE	06 28 5E 71 8E	HEX CODE	1F 22 44 68 88	HEX CODE	0E 31 4E 71 8E
HEX CODE	0E 31 55 79 8E	HEX CODE	04 2C 44 68 8E	HEX CODE	1E 21 46 68 9F	HEX CODE	91 55 35 09	HEX CODE	1E 4E 61 9E	HEX CODE	06 2A 5F 62 82	HEX CODE	06 2A 5F 61 9E	HEX CODE	06 28 5E 71 8E	HEX CODE	06 28 5E 71 8E	HEX CODE	1F 22 44 68 88	HEX CODE	0E 31 4E 71 8E

IDCS5081

Numerals and punctuation

HEX CODE	0E 33 55 79 8E	HEX CODE	8E 73 55 39 0E	HEX CODE	04 2C 44 68 8E	HEX CODE	80 69 5F 21 00	HEX CODE	91 73 55 35 09	HEX CODE	91 75 55 35 0A	HEX CODE	84 6C 54 3F 04	HEX CODE	9D 75 55 35 12	HEX CODE	86 6D 55 35 02	HEX CODE	90 73 54 38 10	HEX CODE	8A 75 55 35 0A
HEX CODE	0E 33 55 79 8E	HEX CODE	8E 73 55 39 0E	HEX CODE	04 2C 44 68 8E	HEX CODE	80 69 5F 21 00	HEX CODE	91 73 55 35 09	HEX CODE	91 75 55 35 0A	HEX CODE	84 6C 54 3F 04	HEX CODE	9D 75 55 35 12	HEX CODE	86 6D 55 35 02	HEX CODE	90 73 54 38 10	HEX CODE	8A 75 55 35 0A
HEX CODE	0E 33 55 79 8E	HEX CODE	8E 73 55 39 0E	HEX CODE	04 2C 44 68 8E	HEX CODE	80 69 5F 21 00	HEX CODE	91 73 55 35 09	HEX CODE	91 75 55 35 0A	HEX CODE	84 6C 54 3F 04	HEX CODE	9D 75 55 35 12	HEX CODE	86 6D 55 35 02	HEX CODE	90 73 54 38 10	HEX CODE	8A 75 55 35 0A
HEX CODE	0E 33 55 79 8E	HEX CODE	8E 73 55 39 0E	HEX CODE	04 2C 44 68 8E	HEX CODE	80 69 5F 21 00	HEX CODE	91 73 55 35 09	HEX CODE	91 75 55 35 0A	HEX CODE	84 6C 54 3F 04	HEX CODE	9D 75 55 35 12	HEX CODE	86 6D 55 35 02	HEX CODE	90 73 54 38 10	HEX CODE	8A 75 55 35 0A

IDCS5082

*CAUTION: No more than 128 LEDs “on” at one time at 100% brightness.

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

User Definable Character Set Examples* (continued)

Scientific notations, ect.

HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE				
06 5E 2E 86	84 6E 5F 9F 00	04 24 48 71 8F	82 65 59 21 02	1F 20 59 75 93	97 7C 52 31 17	1F 20 56 72 91	97 72 52 34 13	0E 20 4A 64 8A	80 75 52 35 00	0D 32 52 72 8D	0E 71 51 2E 11	0C 32 56 71 96	0F 70 5D 3D 02	82 75 5D 45 02	0E 24 4A 71 9F	83 65 49 25 03
0E 31 51 71 8E	9E 68 48 06 01	0E 31 51 71	8E 75 55 35 0E	10 28 44 6A 91	91 7A 44 22 01	09 29 49 6E 90	81 7E 42 22 1C	01 2E 52 64 84	84 68 4F 28 10	04 2E 55 6E 84	04 5F 3A 04	0E 31 51 6A 9B	8D 73 53 33 00	84 6F 50 4F 10	01 2E 5A 6A 8A	0F 52 72 8C
1F 28 44 68 9F	91 7B 55 31 11	18 24 48 7C 80	92 76 4A 20 00	1C 28 44 78 80	92 7A 5A 20 00	12 36 5A 67 80	84 64 4E 2E 02	06 21 4A 67 80	84 64 52 36 0A	07 22 4A 66 80	04 52 3A 14	1C 34 54 60 80	9C 7C 50 20 00	82 7F 50 4F 10	0F 2E 4E 6E 80	04 2E 4E 6E 80
00 24 4E 7E 8E	84 6A 55 3E 0A	00 2E 4E 6E 84	84 6E 55 4A 04	04 4F 6E 84	88 7E 5E 3C 08	04 5F 3E 84	8E 6E 5E 4E 04	04 2F 4E 6E 84	84 6E 5F 2E 0E	0E 2E 4E 6E 8E	80 7E 55 35 15	00 2E 4E 6E 80	8E 7E 5E 4E 0E	84 68 5F 4E 04	04 24 4E 6E 84	04 24 4E 6E 84
04 22 5F 82 84	84 6A 55 3E 0A	04 28 5F 82 84	84 6E 55 4A 04	04 28 5F 82 84	88 7E 5E 3C 08	08 2C 4A 78 80	83 7F 4B 2E 00	0A 35 4A 75 8A	8A 75 4A 35 0A	15 2A 55 6A 95	85 75 55 2A 15	0F 2E 4E 6E 80	8E 7E 5E 4E 0E	84 68 5F 4E 04	04 24 4E 6E 84	0E 3F 5B 7F 8F
83 27 4F 78 9C	83 4D 40 0C 00	83 4D 40 0C 00	8C 6C 4D 27 03	83 4D 40 0C 00	80 40 20 21 01	80 40 20 21 01	81 61 43 22 03	87 67 47 2F 0F	87 67 47 2F 0F	8F 7F 5F 20 00	90 69 49 28 10	90 69 49 28 10	90 69 49 28 10	90 69 49 28 10	90 69 49 28 10	90 69 49 28 10

IDCS5083

Foreign characters

HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE	HEX CODE		
1F 21 5F 84	84 74 55 36 1C	1F 21 21 46 88	92 71 56 34 18	01 22 46 82	80 42 2F 10	04 3F 51 81	8C 68 39 0E	00 4F 9F	89 69 4F 29 03	02 3F 46 92	88 6A 4C 3F 0B	8F 7E 48 2A 0C	90 71 52 32 1E	8C 6A 49 25 0C
08 3F 49 69 8A	89 7E 48 29 0E	04 3F 44 7F 84	8A 6A 5F 2A 0A	0F 29 51 62 8C	84 64 51 32 1C	08 2F 52 62 92	84 6A 4E 2E 08	0F 2F 41 61 9F	91 71 51 31 1F	0A 3F 4A 62 8C	88 7D 49 3E 0B	85 75 41 22 1C	84 62 4E 3E 1E	8A 6A 49 25 12
15 35 55 62 82	8E 69 49 29 09	0E 20 5F 64 98	85 75 56 34 04	08 28 4C 6A 90	9F 44 20 00	04 3F 44 64 98	89 69 4E 2E 08	0E 20 40 60 9F	81 71 51 31 01	1F 21 4A 64 9A	88 75 49 3E 19	89 69 4E 2A 01	81 62 50 20 00	87 60 40 20 07
0E 35 55 64 88	9E 69 49 29 09	0E 35 55 64 98	80 71 51 32 1C	80 45 35 01	80 45 35 01	86 6A 4E 2E 07	80 65 4E 2E 1B	80 65 4E 2E 1B	84 7E 55 35 15	04 3E 55 6A 95	81 71 51 3F 01	81 62 50 20 00	85 65 4E 3E 1F	84 75 45 35 0B
10 3E 50 70 8F	9C 61 42 3C 00	1F 21 41 62 8C	8F 71 5F 21 0E	0E 20 4E 60 8F	82 75 4F 35 0D	04 3F 51 7F 81	8F 74 4F 35 15	01 21 4A 64 8A	88 75 56 34 14	1F 28 5F 68 87	8F 75 55 38 1E	8E 7F 5F 35 15	86 6D 4D 2D 05	8E 75 45 35 0B
0A 2E 51 7F 91	87 7A 4A 3A 07	02 24 4C 64 8E	88 65 4F 31 00	04 2A 4E 71 8E	82 75 4F 2D 02	0A 34 52 7A 96	8F 74 4F 37 00	08 24 51 71 8E	86 71 49 28 03	02 24 51 71 8E	86 61 49 31 06	88 68 51 29 06	04 2A 51 71 8E	08 24 4E 72 8F

IDCS5084

*CAUTION: No more than 128 LEDs "on" at one time at 100% brightness.

SCDQ5541P/Q/R, SCDQ5542P/Q/R, SCDQ5543P/Q/R, SCDQ5544P/Q/R

Revision History: 2010-04-13

Previous Version: 2006-05-12

Page	Subjects (major changes since last revision)	Date of change
all	Lead free device	2006-01-23
4	Package Outlines updated	2010-04-13

Published by
OSRAM Opto Semiconductors GmbH
Wernerwerkstrasse 2, D-93049 Regensburg
www.osram-os.com
© All Rights Reserved.

Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization. If printed or downloaded, please find the latest version in the Internet.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components¹⁾ may only be used in life-support devices or systems²⁾ with the express written approval of OSRAM OS.

¹⁾ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or the effectiveness of that device or system.
²⁾ Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health and the life of the user may be endangered.