


Spec Sheet

Array Type Multilayer Ceramic Capacitors

T2K110BJ104KB-T

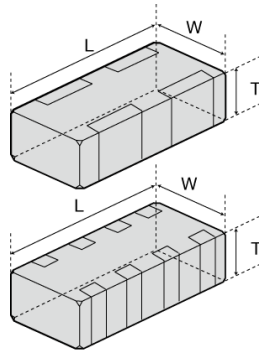

■ Features

- Item Summary
25V, X5R, 0.1 μ F, \pm 10%, 0504
- Lifecycle Stage
Non-preferred
- Standard packaging quantity (minimum)
Taping paper 4000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	0504/1410
Rated Voltage (max)	25V
Capacitance	0.1 μ F
Capacitance Tolerance	\pm 10%
Resistance	10,000 M Ω min.
Dielectric Loss Tangent	5%MAX
Temperature Characteristics (EIA/JIS)	X5R/B
Temperature Range (EIA/JIS)	-55 to +85 $^{\circ}$ C/-25 to +85 $^{\circ}$ C
Capacitance Change (EIA/JIS)	\pm 15/ \pm 10%
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.37mm \pm 0.07
W	1.0mm \pm 0.08
T	0.6mm \pm 0.06
e	0.36mm \pm 0.10