


Spec Sheet

Array Type Multilayer Ceramic Capacitors

E2K110B7473KB-T

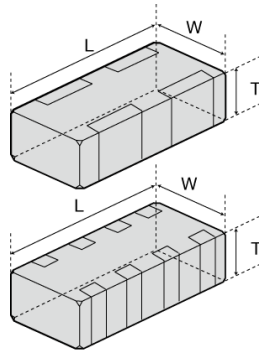

■ Features

- Item Summary  
16V, X7R, 0.047  $\mu$ F,  $\pm$ 10%, 0504
- Lifecycle Stage  
Non-preferred
- Standard packaging quantity (minimum)  
Taping paper 4000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	0504/1410
Rated Voltage (max)	16V
Capacitance	0.047 $\mu$ F
Capacitance Tolerance	$\pm$ 10%
Resistance	10,000 M $\Omega$ min.
Dielectric Loss Tangent	3.5%MAX
Temperature Characteristics (EIA/JIS)	X7R/-
Temperature Range (EIA/JIS)	-55 to +125 $^{\circ}$ C/-
Capacitance Change (EIA/JIS)	$\pm$ 15/-%
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.37mm $\pm$ 0.07
W	1.0mm $\pm$ 0.08
T	0.6mm $\pm$ 0.06
e	0.36mm $\pm$ 0.10