


Spec Sheet

Array Type Multilayer Ceramic Capacitors

E2K110B7104KB-T

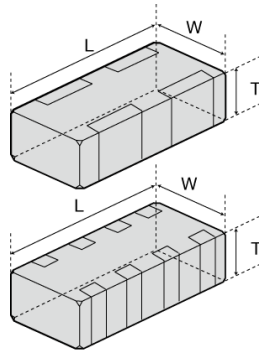

■ Features

- Item Summary
16V, X7R, 0.1 μ F, \pm 10%, 0504
- Lifecycle Stage
Non-preferred
- Standard packaging quantity (minimum)
Taping paper 4000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	0504/1410
Rated Voltage (max)	16V
Capacitance	0.1 μ F
Capacitance Tolerance	\pm 10%
Resistance	500 M Ω μ F
Dielectric Loss Tangent	5%MAX
Temperature Characteristics (EIA/JIS)	X7R/-
Temperature Range (EIA/JIS)	-55 to +125 $^{\circ}$ C/-
Capacitance Change (EIA/JIS)	\pm 15/-%
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.37mm \pm 0.07
W	1.0mm \pm 0.08
T	0.6mm \pm 0.06
e	0.36mm \pm 0.10