


Spec Sheet

Array Type Multilayer Ceramic Capacitors

J2K110BJ225KA-T

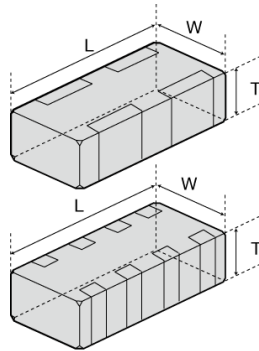

■ Features

- Item Summary
6.3V, X5R, 2.2 μ F, \pm 10%, 0504
- Lifecycle Stage
Non-preferred
- Standard packaging quantity (minimum)
Taping paper 4000pcs

■ Products characteristics table

CaseSize (EIA/JIS)	0504/1410
Rated Voltage (max)	6.3V
Capacitance	2.2 μ F
Capacitance Tolerance	\pm 10%
Resistance	100 M Ω μ F
Dielectric Loss Tangent	10%MAX
Temperature Characteristics (EIA/JIS)	X5R/-
Temperature Range (EIA/JIS)	-55 to +85 $^{\circ}$ C/-
Capacitance Change (EIA/JIS)	\pm 15/-%
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.37mm \pm 0.07
W	1.0mm \pm 0.08
T	0.8mm \pm 0.08
e	0.36mm \pm 0.10