

4

3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MARCH .2006.  
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		ECR-07-010734	08/05/07	AM	FWK
B1		ECR-10-015172	13AUG10	RK	JK

NOTES:

- ELECTRICAL DATA: CONTACT RESISTANCE: 10 mOhm MAX  
 INSULATION RESISTANCE: 100 MOhm MIN at 500VDC  
 CURRENT RATING: 5 AMPS  
 BREAKDOWN VOLTAGE: 500 VAC MIN PER MINUTE
- ENVIRONMENTAL: OPERATING TEMPERATURE: -20°C TO +80°C  
 SEALING REQUIREMENTS: IP67
- PROD SPEC: 108-3641
- PACKAGING: 107-3334
- FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
- ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

ITEM	DESCRIPTION	MATERIAL	FINISH/COLOUR	QTY
1	SCREW NUT	ZINC DIE CAST	2.5µm NICKEL PLATED	1
2	CONNECTOR BODY	POLYURETHANE	BLACK	1
3	PIN CONTACT	BRASS	0.15µm GOLD OVER NICKEL	4
4	4 CORE CABLE (CORES 22AWG TO UL2464)	PVC JACKET UV RESISTANT	BLACK	1

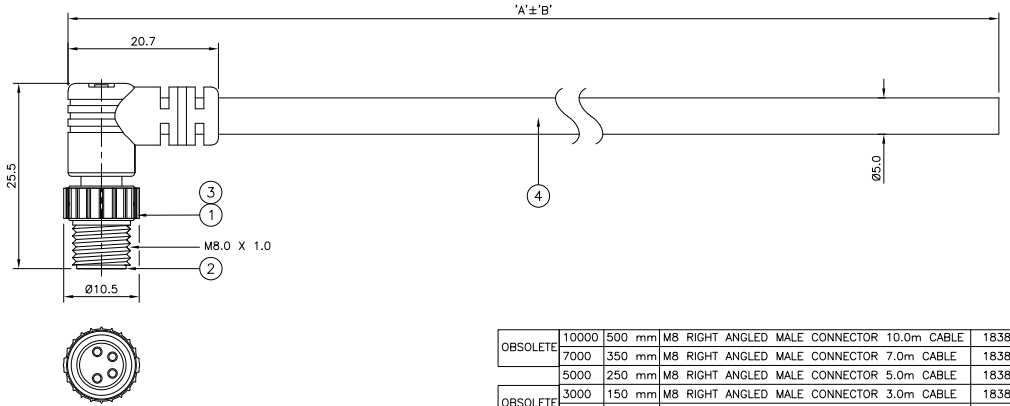

OBSOLETE	DIM A	TOL 'B'	DESCRIPTION	PART NUMBER
10000	500 mm		M8 RIGHT ANGLED MALE CONNECTOR 10.0m CABLE	1838292-5
7000	350 mm		M8 RIGHT ANGLED MALE CONNECTOR 7.0m CABLE	1838292-4
5000	250 mm		M8 RIGHT ANGLED MALE CONNECTOR 5.0m CABLE	1838292-3
3000	150 mm		M8 RIGHT ANGLED MALE CONNECTOR 3.0m CABLE	1838292-2
2000	100 mm		M8 RIGHT ANGLED MALE CONNECTOR 2.0m CABLE	1838292-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	29MAR06	Tyco Electronics Corporation Bideford, UK, EX39 4HE
mm	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PVC ANGLES ±	CHK	07AUG06	
MATERIAL	FINISH	APVD	07AUG06	NAME
-	-	F.WHEELER-KING		M8 RIGHT ANGLED MALE CONNECTOR WITH STRAIN RELIEF 4 POSITION, PVC CABLE
		PRODUCT SPEC	SIZE	
		APPLICATION SPEC	CAGE CODE	
		WEIGHT	DRAWING NO	
		CUSTOMER DRAWING	A3 00779 C=1838292	
		SCALE		RESTRICTED TO
		NTS		1 of 1
		SHEET		REV B1