

2007/11/21 04:09:59 ctribbble


DRAWING FOR REFERENCE: This is subject to change without notice

APPLICABLE STANDARD						
RATING	OPERATING TEMPERATURE RANGE	-40°C TO +90°C(90%RH MAX)	STORAGE TEMPERATURE RANGE	-40°C TO +90°C(90%RH MAX)		
	POWER	——w	CHARACTERISTIC IMPEDANCE	50Ω ( 0 TO 6GHz)		
	PECULIARITY	——	APPLICABLE CABLE	RF-MF5023 (BLACK) : NISSEI ELECTRIC CO.,LTD.		
SPECIFICATIONS						
ITEM	TEST METHOD		REQUIREMENTS	QT	AT	
CONSTRUCTION						
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X	X	
MARKING	CONFIRMED VISUALLY.			X	X	
ELECTRIC CHARACTERISTICS						
CONTACT RESISTANCE	10 mA MAX (DC OR 1000 Hz).		CENTER CONTACT	118 mΩ MAX.	X	X
			OUTER CONTACT	40 mΩ MAX.	X	X
INSULATION RESISTANCE	100 V DC.		500 MΩ MIN.		X	X
VOLTAGE PROOF	200 V AC FOR 1 min.CURRENT LEAKAGE 2mA MAX.		NO FLASHOVER OR BREAKDOWN.		X	X
VOLTAGE STANDING WAVE RATIO	FREQUENCY 0.045 TO 3 GHz.		VSWR	1.3 MAX.	X	—
	FREQUENCY 3 TO 6 GHz.		VSWR	1.4 MAX.		
INSERTION LOSS	FREQUENCY ----- TO ---- GHz		—— dB MAX.		—	—
MECHANICAL CHARACTERISTICS						
CABLE CLAMP ROBUSTNESS (AGAINST CABLE PULL)	APPLYING A PULL FORCE THE CABLE AXIALLY AT 7N MAX.		① NO WITHDRAWAL AND BREAKAGE OF CABLE. ② NO BREAKAGE OF CLAMP.		X	—
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
REMARK				APPROVED	MH. YAMANE	07. 04. 16
NOTE① VSWR was measured with SMA conversion adapters Attached to both ends of the applicable 100 cm cable assembled.				CHECKED	NK. NINOMIYA	07. 04. 16
Unless otherwise specified, refer to JIS C 5402.				DESIGNED	YK. YASUMURO	07. 04. 13
				DRAWN	YK. YASUMURO	07. 04. 13
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-311407-08	
<b>HRS</b>	SPECIFICATION SHEET		PART NO.	W. FL-2LPG-062N2D-A- (100)		
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL321-3828-8-08		1/1

2007/11/21 04:09:59 ctribble

DRAWING FOR REFERENCE: This is subject to change without notice

1		2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△				. . .	
△					△				. . .	
△					△				. . .	

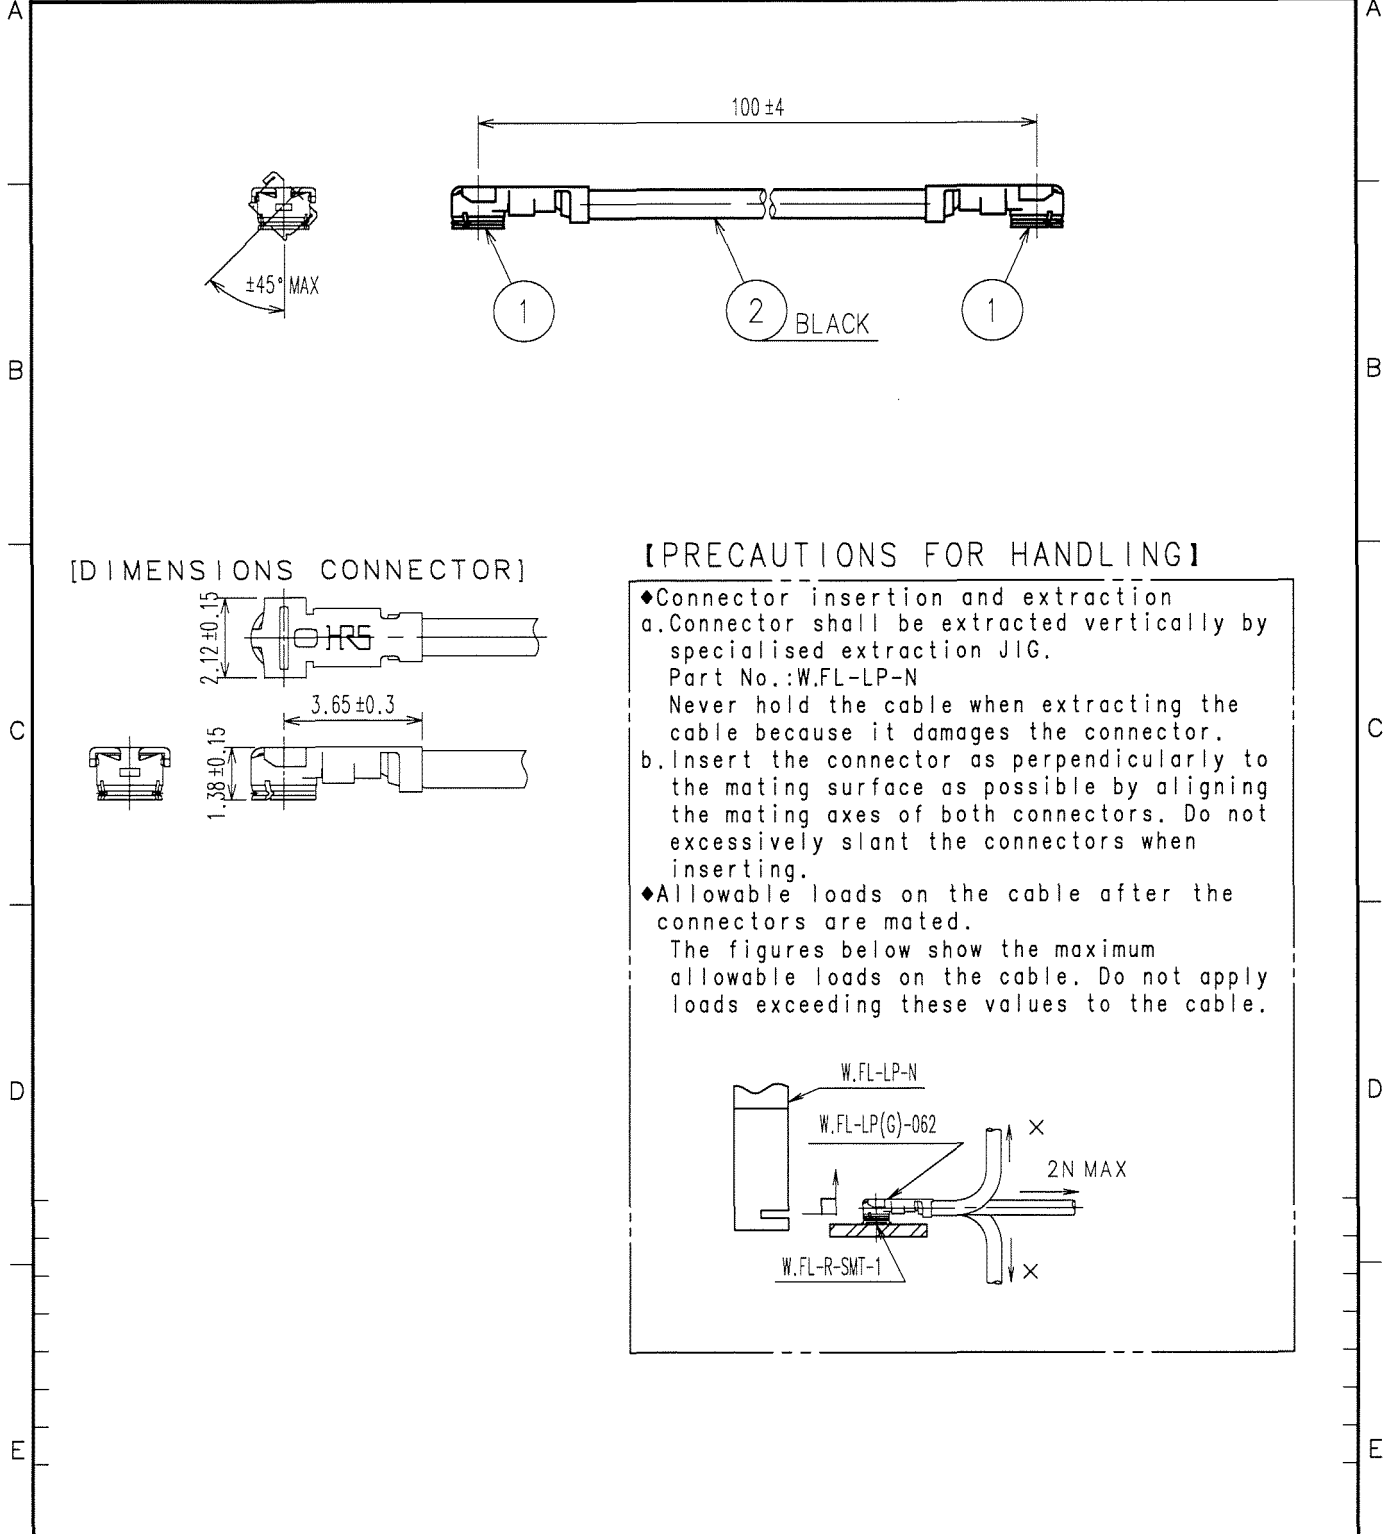

1	W.FL-LP(G)-062	CL331-0477-6	2	RF-MF5023(BLACK)	NISSEI ELECTRIC CO.,LTD.	
NO.	PART NO	CODE NO	NO.	PART NO	MANUFACTURER	
CODE NO. (OLD) CL 395-5071-8			DRAWN <i>y. yasunaka</i> 07.04.13	DESIGNED <i>y. yasunaka</i> 07.04.13	CHECKED <i>n. Ninomiya</i> 07.04.13	APPROVED <i>m. yanama</i> 07.04.13
			RELEASED			

TO  
RF