
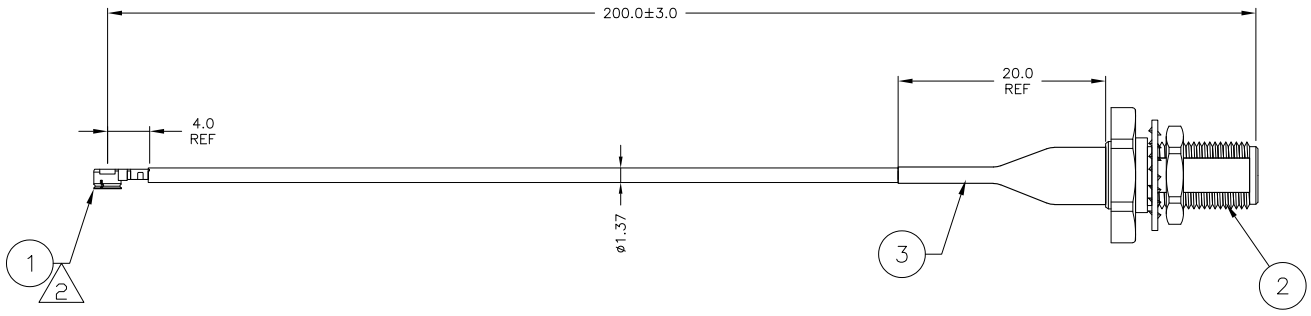


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A1		REVISED PER ECO-11-005033	23MAR11	RK	HMR

- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
- HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR, TYPE III
- CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100ms VSWR: 1.5:1 MAX.

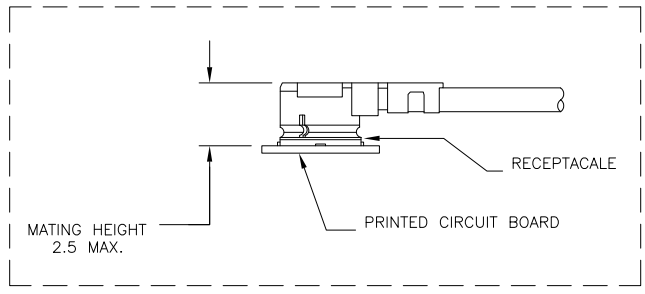

2032440-1
TE CONNECTIVITY PART NO.

A/R	MR	DESCRIPTION	ITEM
1	PC	TUBING, HEAT SHRINK	3
1	PC	SMA, BLKHD, JACK	2
1	PC	UMCC, PLUG [1.37mm CABLE]	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	E.C. CLAYBAUGH	04/DEC/07
DIMENSIONS: mm [INCHES]		CHK	J. ORNER	04/DEC/07
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. ORNER	04/DEC/07
0 PLC	±-	PRODUCT SPEC		
1 PLC	±-	APPLICATION SPEC		
2 PLC	±-	WEIGHT		
3 PLC	±-	CUSTOMER DRAWING		
4 PLC	±-			
ANGLES	±-			
MATERIAL	FINISH			

STE TE Connectivity			
CABLE ASSY, RF, UMCC PLUG TO SMA BLKHD JACK [1.37mm CABLE]			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=2032440	-
SCALE		SHEET	REV
N.T.S.		1 of 1	A1