



THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		REVISIONS	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.		LOC	DIST
				GP	00
P	LTR	DESCRIPTION		DATE	DWN
A1		REVISED PER ECO-11-005033		23MAR11	RK
					APVD
					HMR

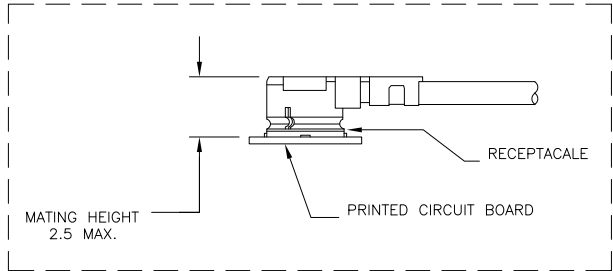

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.
2. HIROSE COMPATIBLE, 2.5 mm MATING HEIGHT. UMCC CONNECTOR TYPE III.
3. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY. HI-POT AT 150 VDC FOR 100ms VSWR: 1.5:1 MAX.

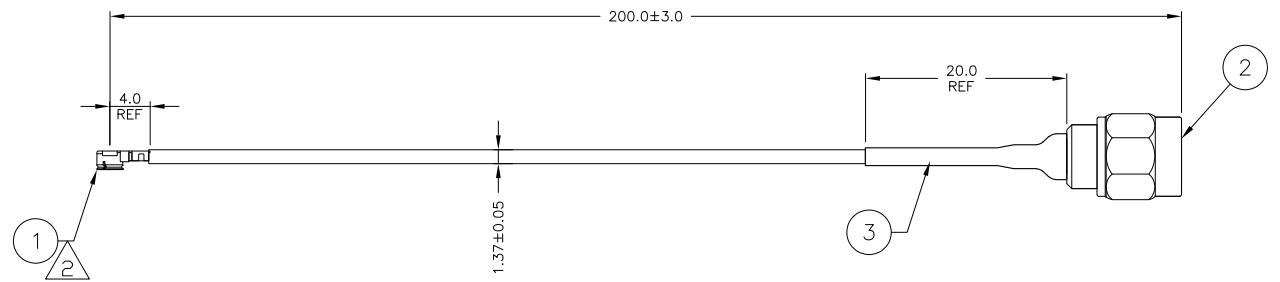

2032439-1
PART NO.

1	PC	TUBING, HEAT SHRINK	3
1	PC	SMA, PLUG	2
1	PC	UMCC, PLUG WITH 1.37 CABLE	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	E.C. CLAYBAUGH	04/DEC/07
CHK	J. ORNER	04/DEC/07
APVD	J. ORNER	04/DEC/07

STE TE Connectivity

CABLE ASSY, RF, UMCC PLUG TO SMA PLUG [1.37mm CABLE]

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=2032439	-

CUSTOMER DRAWING

SCALE: N.T.S. SHEET 1 of 1 REV A1