


**Pomona**<sup>®</sup>

**Model BNC-C**  
**BNC Male To Male Cable Assembly**

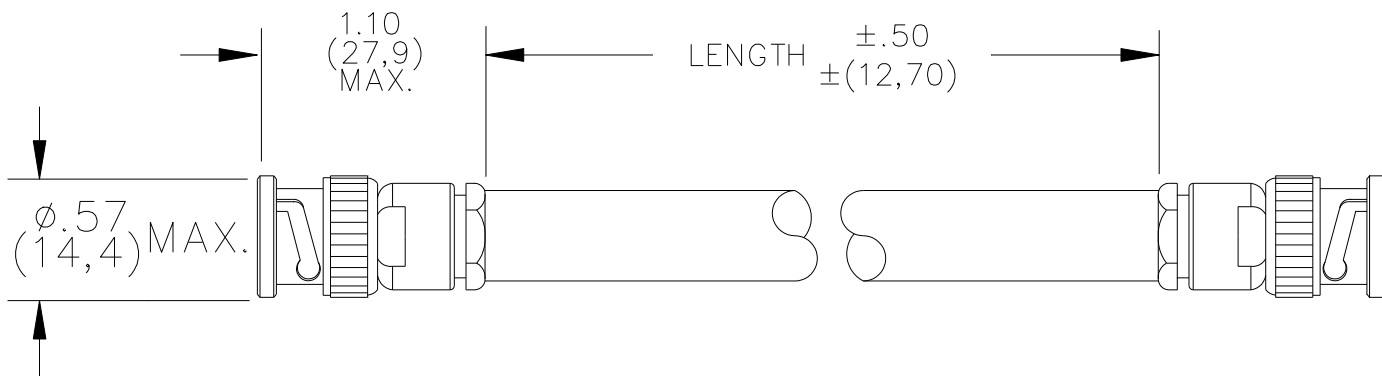

| Part No. | Cable Type | Capacitance<br>PF/ft. | Nominal<br>Impedance | Cable Color | Cable O. D. |
|----------|------------|-----------------------|----------------------|-------------|-------------|
| BNC-C-XX | RG58C/U    | 30.8                  | 50 Ohms              | Black       | 0.195"      |
|          |            |                       |                      |             |             |

**MATERIALS:**

BNC Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass

Dielectric: PTFE

**RATINGS:**

Operating Voltage: Shield-Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: +80°C (+176°F) Max.

Nominal Impedance: 50 Ohms

**ORDERING INFORMATION:** Model BNC-C-XX

XX = Cable Length in inches, length tolerance:  $\pm 0.5$ "

Standard Lengths: 18", 24", 36", 48", 60", 72", 96", & 600".

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA