



3705

September 2011

PRODUCT DESCRIPTION

3705 provides the following product characteristics:

Technology	Acrylate
Appearance	Bone-white to beige translucent paste
Components	One component - requires no mixing
Product Benefits	<ul style="list-style-type: none"> • Thixotropic • Medium viscosity • Fast UV cure • No post cure required • Good adhesion to a variety of substrates
Cure	Ultraviolet (UV) light, Visible light
Application	Edgebond
Typical Assembly Applications	Bonding electronic components on a PCB

3705 UV cure adhesive is designed for high throughput assembly operations. Its thixotropic nature reduces migration of the liquid product after application to the substrate.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Viscosity, Brookfield - HBT, 25 °C, mPa·s (cP):	
Spindle TB, Helipath, speed 10 rpm	44,000
Specific Gravity @ 25 °C	1.1
Flash Point - See MSDS	

TYPICAL CURING PERFORMANCE

Recommended UV Cure

Light Source and Condition:	
Zeta 7411 UV Flood System	
Light Intensity, mW/cm ²	30
UV Wavelength, nm	365
Time, seconds	80

3705 can be cured by exposure to UV and/or visible light of sufficient intensity. Cure rate and ultimate depth of cure depend on light intensity, spectral distribution of light source, exposure time, etc.

Fixture Time

UV fixture time is defined as the light exposure time required to develop a shear strength of 0.1 N/mm².


UV Fixture Time, Glass microscope slides, 0 gap, seconds:	
6 mW/cm ² , measured @ 365 nm	≤10

Depth of Cure

Cure depth depends both on external factors including the type of light source, light intensity and exposure time and on internal factors including composition of the adhesive

The following graph show the increase in depth of cure with time as measured from the thickness of the cured product formed in a 15mm diameter PTFE die.

Curing System: Electrodeless, D bulb

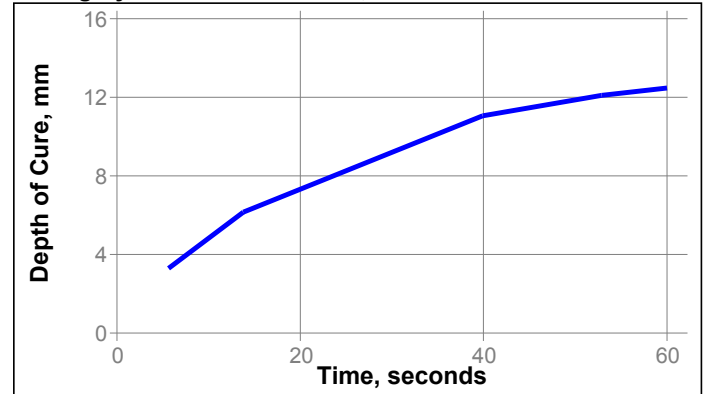

TYPICAL PROPERTIES OF CURED MATERIAL

Physical Properties:

Coefficient of Thermal Expansion, ASTM E831-86, μm/m/K:	
alpha 1	66
alpha 2	151
alpha 3	217

Glass Transition Temperature, ASTM D 1640, °C:

Tg 1	-39
Tg 2	77
Thermal Conductivity, ASTM E1530, W/mK	
	0.17
Elongation, ASTM D882, %	
	186
Tensile Modulus, ASTM D882	N/mm ² 175
	(psi) (25,381)
Tensile Strength, ASTM D882	N/mm ² 15.6
	(psi) (2,262)

Electrical Properties:

Dielectric Constant, ASTM D150:	
@ 100Hz	4.584
@ 1KHz	4.799
@ 10KHz	4.633
@ 100KHz	4.221
@ 1MHz	4.312
Dissipation Factor, ASTM D150:	
@ 100Hz	0.0319
@ 1KHz	0.0222
@ 10KHz	0.0189
@ 100KHz	0.02
@ 1MHz	0.0343
Volume Resistivity @ 100 volts, ohms-cm	1.13×10 ¹⁷
Surface Resistivity 100 volts, ohms	1.53×10 ¹⁶

TYPICAL PERFORMANCE OF CURED MATERIAL

Shear Strength:

Block Shear Strength, ASTM 700:	
Polycarbonate to Polycarbonate	N/mm ² 12.56
	(psi) (1,822)



GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

DIRECTIONS FOR USE

1. Product is shipped at 2 to 8°C with ice packs to prevent excessive temperature exposure during shipping.
2. This product is light sensitive; exposure to daylight, UV light and artificial lighting should be kept to a minimum during storage and handling.
3. The product should be dispensed from application with black feedlines.
4. For best performance bond surfaces should be clean and free from grease.
5. Apply adhesive to one of the bond surfaces and assemble immediately.
6. Cure rate is dependent on lamp intensity, distance from light source, depth of cure needed or bondline gap and light transmission of the substrate through which the radiation must pass.
7. Cooling should be provided for temperature sensitive substrates such as thermoplastics.
8. Crystalline and semi-crystalline thermoplastics should be checked for risk of stress cracking when exposed to liquid adhesive.
9. Excess uncured adhesive can be wiped away with organic solvent (e.g. Acetone).
10. Bonds should be allowed to cool before subjecting to any service loads.

Not for product specifications

The technical data contained herein are intended as reference only. Please contact your local quality department for assistance and recommendations on specifications for this product.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Optimal Storage: 8 to 28°C. Storage below 8°C or greater than 28°C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

Not for product specifications

The technical data contained herein are intended as reference only. Please contact your local quality department for assistance and recommendations on specifications for this product.

Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$
 $\text{kV/mm} \times 25.4 = \text{V/mil}$
 $\text{mm} / 25.4 = \text{inches}$
 $\text{N} \times 0.225 = \text{lb}$
 $\text{N/mm} \times 5.71 = \text{lb/in}$
 $\text{N/mm}^2 \times 145 = \text{psi}$
 $\text{MPa} \times 145 = \text{psi}$
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$
 $\text{mPa}\cdot\text{s} = \text{cP}$

Trademark usage

All trademarks in this document are trademarks and/or registered trademarks of Henkel in the US and elsewhere.

Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation and its affiliates ("Henkel") specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel products. Henkel specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Reference 0.0