


Configuration:

CN36M	CN36M
1 _____	1 _____
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
5 _____	5 _____
6 _____	6 _____
7 _____	7 _____
8 _____	8 _____
9 _____	9 _____
10 _____	10 _____
11 _____	11 _____
12 _____	12 _____
13 _____	13 _____
14 _____	14 _____
15 _____	15 _____
16 _____	16 _____
17 _____	17 _____
18 _____	18 _____
19 _____	19 _____
20 _____	20 _____
21 _____	21 _____
22 _____	22 _____
23 _____	23 _____
24 _____	24 _____
25 _____	25 _____
26 _____	26 _____
27 _____	27 _____
28 _____	28 _____
29 _____	29 _____
30 _____	30 _____
31 _____	31 _____
32 _____	32 _____
33 _____	33 _____
34 _____	34 _____
35 _____	35 _____
36 _____	36 _____
Shield _____	Shield _____

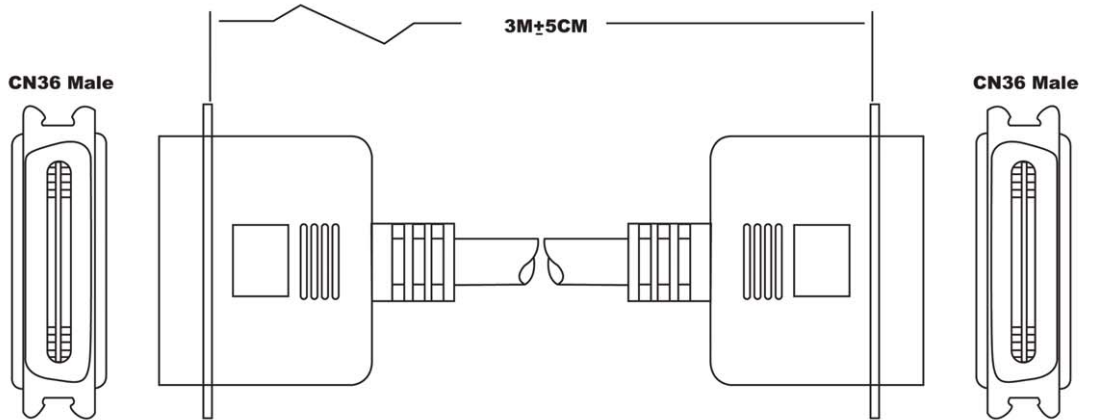

**Material:**

- 1.Cable: #28 36C+1+AL/MY(Beige PVC Jacket) O.D:9.0MM
- 2.Both connectors with normal type
- 3.Overall Molded with beige PVC

**Notes:**

- 1.Total Length: 3M±5CM
- 2.Color: Beige
- 3.Molded Type



ITEM NO

**AK426-3-R (3 Meters)**

TITLE

**Centronics Printer Cable,  
CENT 36-Pin Male to CENT 36-Pin Male**

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2008 by Assmann Electronic Components  
All International Rights Reserved