


Pomona®

Model 4243
Double Binding Post Assembly

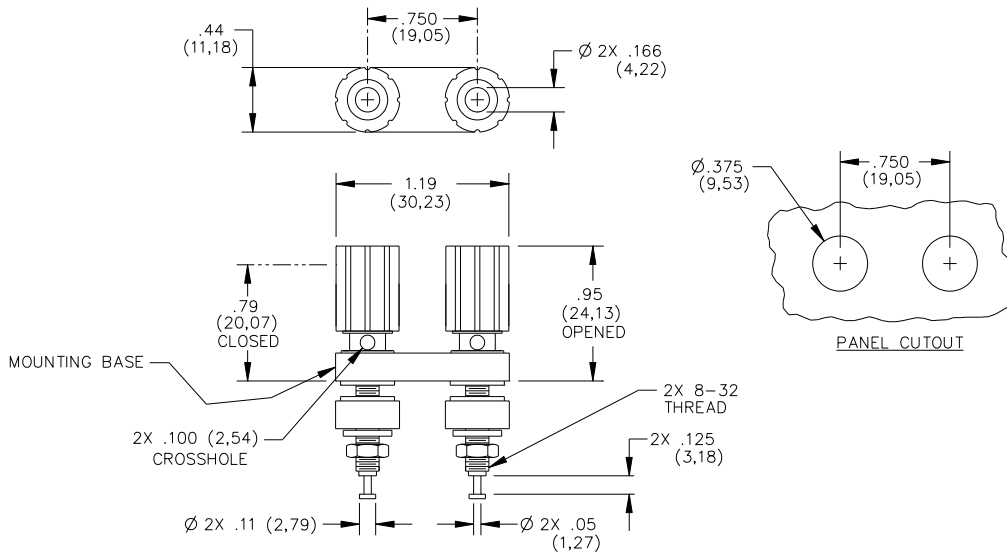

FEATURES:

- Accepts standard banana plugs
- Mounts in panels from 1.57 (.062) to 6.35 (.250) thick.

MATERIALS:

Insulated Captive Thumb Nut: Brass
Finish: Tin plated brass
Insulation: Polycarbonate
Mounting Base: Polycarbonate
Insulator: Polycarbonate
Lockwasher: Steel
Hex Nut: Brass
Binding Post: Bright Tin plated brass

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max.
Hands free testing in controlled voltage environments: 2500 WVDC Max.
Operating Temperature: +115°C (+239°F) Max.
Current: 15 Amperes

ORDERING INFORMATION: Model 4243-*

*=Mounting Base Color, -0 Black, -2 Red

Ordering Example: 4243-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA