

4

3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
D		ECO-14-008835	26JUN14	AP	DM

NOTE:

1. PACKAGING ACC. TO TE SPEC.107-18032  
BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND
2. ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO TE-SPEC.108-18857, SUBSECTION 3.1.1
3. ASSEMBLY COLOR: WHITE
4. KEYING: HV-4

PN	L	TOLERANCES/mm
X-2083072-1	610mm (2ft)	+/- 5
X-2083072-2	1270mm (4ft)	+/- 15
X-2083072-3	1880mm (6ft)	+/- 20
X-2083072-4	2490mm (8ft)	+/- 20
X-2083072-5	3100mm (10ft)	+/- 30
X-2083072-6	3660mm (12ft)	+/- 30
X-2083072-7	4270mm (14ft)	+/- 50
X-2083072-8	4880mm (16ft)	+/- 50

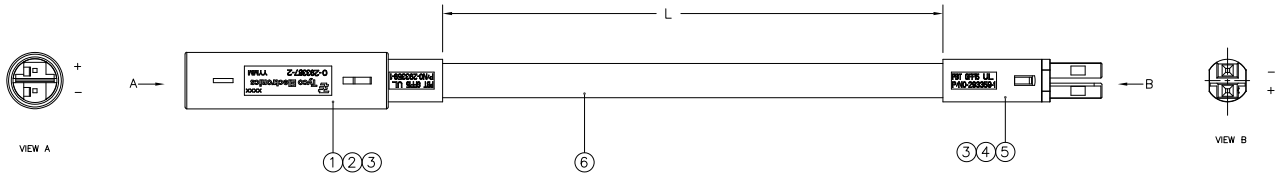

mm	AR	DESCRIPTION	POS.
		Cable SVT 2xAWG18 UL WH	6
PC	1	PLUG MINI HVL HV-4	5
PC	2	MICRO QUADLOK SYSTEM SOCKET CONTACT	4
PC	2	TUBE FOR SVT CABLE	3
PC	2	MICRO QUADLOK SYSTEM PIN CONTACT	2
PC	1	OUTLET, MINI HVL 7.5mm HV-4	1
UOM	QTY	DESCRIPTION	POS.
	1--X		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVINDRA K 28MAR11	TE Connectivity	
DIMENSIONS: mm		CHK R HOSSAINI 31MAR11	NAME CABLE ASSEMBLY NECTOR S LINE 2POS. HV-4, MALE TO FEMALE	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		APVD R HOSSAINI 31MAR11	PRODUCT SPEC -	
MATERIAL -		FINISH -	APPLICATION SPEC -	RESTRICTED TO -
		WEIGHT -	SIZE A3	CAGE CODE 00779
		CUSTOMER DRAWING	DRAWING NO C=2083072	SCALE NTS
			SHEET 1 of 1	REV D