



Pomona®

**Model 5815A**  
**Oscilloscope Probe RF Detector**

PROBE ASSEMBLY

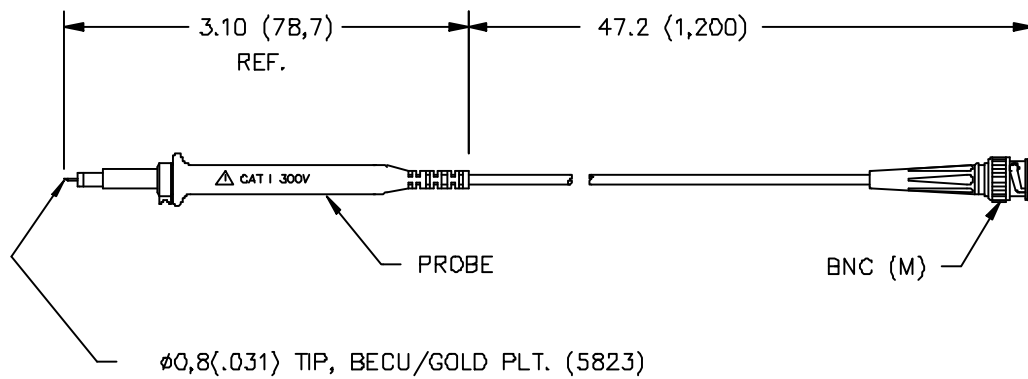

ACCESSORIES (SUPPLIED WITH KIT)

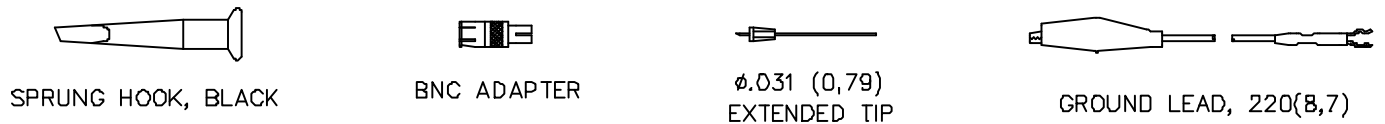

Table

Diode Turn on Voltage (mv)	Peak AC Input Voltage (v)	Input C(pF)	Bandwidth	DC Isolation V incl. Peak AC V
200	50	5	100kHz to 800MHz	300

**FEATURES:**

- Model 5815A is a miniature RF Detector Probe intended for use with a wide range of oscilloscopes.
- This probe is very useful in measuring RF signals up to 800 MHz.
- Provides an output of 1 VDC for an input of 1 VRMS sinewave

**RATINGS: CAT I, 300 V**

**ORDERING INFORMATION: Model 5815A**

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).  
All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies. Made in USA