

4

3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MARCH 2006 .
© COPYRIGHT 2006 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C2	REVISED PER ECO-11-005294	02APR11	RK	HMR

NOTES:

- ELECTRICAL DATA: CONTACT RESISTANCE: 10 mOhm MAX
INSULATION RESISTANCE: 100 MOhm MIN at 500VDC
CURRENT RATING: 5 AMPS
BREAKDOWN VOLTAGE: 500 VAC MIN PER MINUTE
- ENVIRONMENTAL: OPERATING TEMPERATURE: -20°C TO +80°C
SEALING REQUIREMENTS: IP67
- PROD SPEC: 108-3641
- PACKAGING: 107-3334
- FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
- ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

ITEM	DESCRIPTION	MATERIAL	FINISH/COLOUR	QTY
1	SCREW NUT	ZINC DIE CAST	2.5µm NICKEL PLATED	1
2	CONNECTOR BODY	POLYURETHANE	BLACK	1
3	SOCKET CONTACT	BRASS	0.15µm GOLD OVER NICKEL	3
4	3 CORE CABLE (CORES 22AWG TO UL2464)	PVC JACKET UV RESISTANT	BLACK	1
5	'O' RING	VITON	GREEN	1

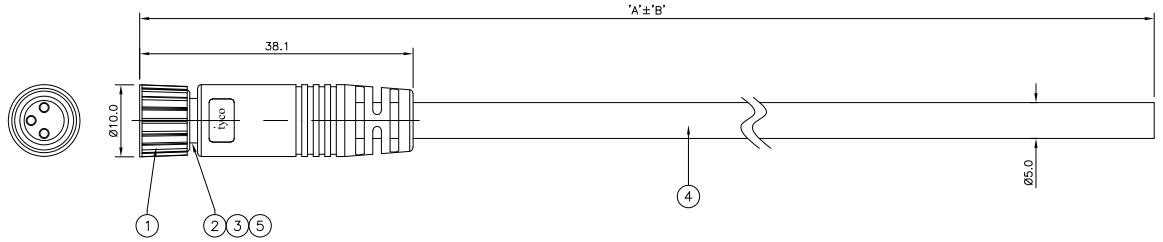

	10000	500 mm	M8 STRAIGHT FEMALE CONNECTOR 10.0m CABLE	1838282-5
OBSOLETE	7000	350 mm	M8 STRAIGHT FEMALE CONNECTOR 7.0m CABLE	1838282-4
	5000	250 mm	M8 STRAIGHT FEMALE CONNECTOR 5.0m CABLE	1838282-3
OBSOLETE	3000	150 mm	M8 STRAIGHT FEMALE CONNECTOR 3.0m CABLE	1838282-2
	2000	100 mm	M8 STRAIGHT FEMALE CONNECTOR 2.0m CABLE	1838282-1
	DIM A	TOL 'B'	DESCRIPTION	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME		RESTRICTED TO	
mm		0 PLC	±	MANJUNATH.T.N	29MAR06	STE TE Connectivity			
		1 PLC	±	F.WHEELER-KING	07AUG06	M8 STRAIGHT FEMALE CONNECTOR WITH STRAIN RELIEF 3 POSITION, PVC CABLE			
		2 PLC	±	F.WHEELER-KING	07AUG06				
		3 PLC	±						
		4 PKC	±						
		ANGLES	±						
MATERIAL		FINISH		PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				APPLICATION SPEC		A3	00779	C=1838282	
				WEIGHT		CUSTOMER DRAWING		SCALE	SHEET
								NTS	1 of 1
									REV
									C2